



**KP500** User Guide

**LG** ELECTRONICS INC.

**KP500** User Guide

E N G L I S H

**CE 0168**

[www.lgmobile.com](http://www.lgmobile.com)

P/N : MMBB0307441 (1.0) W

Bluetooth QD ID B014534



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



## KP500 User Guide

Congratulations on your purchase of the advanced and compact KP500 phone by LG, designed to operate with the latest digital mobile communication technology.



#### **Disposal of your old appliance**

- 1** When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
- 2** All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- 3** The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
- 4** For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.

- Set up **01**
- Your standby screen **02**
- The basics **03**
- Get creative **04**
- Get organised **05**
- The web **06**
- Settings **07**
- Accessories **08**

# Contents

## Set up

Getting to know your phone .....	8
Open view .....	10
Installing the USIM and battery .....	11
Memory card .....	14
Menu map .....	16

## Your standby screen

Touch screen tips .....	17
-------------------------	----

## The basics

Calls .....	22
Making a call .....	22
Making a call from your contacts .....	23
Answering and rejecting a call .....	23
In-call options .....	24
Adjusting the call volume .....	25
Speed dialling .....	25
Making a second call .....	25
Turning off DTMF .....	26
Viewing your call logs .....	26
Using call divert .....	27
Using call barring .....	27
Changing the common call setting .....	28
Contacts .....	30
Searching for a contact .....	30
Adding a new contact .....	30
Contact options .....	31
Creating a group .....	32

Changing your contact settings .....	33
Viewing information .....	34
Messaging .....	35
Messaging .....	35
Sending a message .....	35
Entering text .....	36
T9 predictive .....	36
Abc manual .....	37
Keyboard .....	37
Handwriting recognition .....	38
Setting up your email .....	40
Retrieving your email .....	43
Sending an email using your new account .....	43
Changing your email settings .....	44
Message folders .....	45
Managing your messages .....	46
Using templates .....	47
Using emoticons .....	47
Changing your text message settings .....	48
Changing your multimedia message settings .....	49
Changing your other settings .....	50

## Get creative

Camera .....	51
Taking a quick photo .....	51

After you've taken your photo.....	51	Adding text to a photo.....	69
Getting to know the viewfinder.....	52	Adding an effect to a photo.....	70
Choosing a shot type.....	53	Morphing a photo.....	71
Adjusting the exposure.....	53	Adding a colour accent to a photo ...	72
Using continuous shot mode.....	54	Swapping the colours in a photo.....	72
Using the advanced settings.....	54	Trimming the length of your video...	73
Changing the image size.....	56	Merging two videos together.....	73
Choosing a colour effect.....	56	Merging a photo with a video.....	74
Viewing your saved photos.....	57	Adding text to a video.....	75
<b>Video camera.....</b>	<b>58</b>	Overlaying a photo.....	76
Shooting a quick video.....	58	Adding a voice recording.....	76
After you've shot your video.....	59	Adding a soundtrack to your video..	77
Getting to know the viewfinder.....	60	Changing the speed of your video ...	78
Adjusting the Exposure.....	61	<b>Multimedia.....</b>	<b>79</b>
Using the advanced settings.....	61	Pictures.....	79
Changing the video image size.....	63	My images option menus.....	79
Choosing a colour tone.....	63	Sending a photo.....	80
Watching your saved videos.....	64	Using an image.....	81
<b>Your photos and videos.....</b>	<b>65</b>	Printing an image.....	81
Viewing your photos and videos.....	65	Moving or copying an image.....	82
Using zoom when viewing a photo..	65	Creating a slide show.....	82
Adjusting the volume when		Sounds.....	82
viewing a video.....	65	Using a sound.....	83
Capturing an image from a video.....	66	Videos.....	83
Viewing your photos as a slide		Using options while video is paused	83
show.....	66	Editing a video clip.....	84
Setting a photo as wallpaper.....	67	Sending a video clip.....	84
Editing your photos.....	68	Using the video options menu.....	85

# Contents

Games and Applications .....	85	Sharing a to do item .....	96
Installing a game/application via local install .....	86	Adding a memo .....	96
Playing a game .....	86	Using date finder .....	97
Using the games options menu.....	86	Setting your alarm .....	97
Documents .....	87	Adding a memo with drawing panel .....	98
Transferring a file to your phone .....	87	Voice recorder .....	98
Viewing a file.....	87	Recording a sound or voice.....	99
Others.....	88	Sending the voice recording.....	99
Creating a movie .....	88	Using your calculator.....	100
Music.....	89	Converting a unit.....	100
Transferring music onto your phone	90	Using the stopwatch .....	101
Playing a song .....	90	Adding a city to your world time....	101
Using options while playing music..	91	PC Sync.....	102
Creating a playlist.....	91	Installing LG PC Suite on your computer .....	102
Editing a playlist.....	92	Connecting your phone and PC.....	102
Deleting a playlist.....	92	Backing up and restoring your phone's information .....	103
Using the radio.....	92	Viewing your phone files on your PC .....	103
Searching for stations .....	93	Synchronising your contacts.....	104
Resetting channels .....	93	Synchronising your messages .....	104
Listening to the radio.....	93	Using your phone as a mass storage device .....	105
<b>Get organised</b>		Using your phone as Music	
Organiser .....	94	Sync device.....	105
Adding an event to your calendar ....	94		
Changing your default calendar view .....	95		
Adding an item to your to do list.....	95		

## The web

Browser .....	106
Accessing the web .....	106
Adding and accessing your bookmarks .....	106
Using RSS reader .....	107
Saving a page .....	107
Accessing a saved page .....	108
Viewing your browser history .....	108
Changing the web browser settings .....	108
Using your phone as a modem .....	109

## Settings

Personalising your profiles .....	111
Changing your screen settings .....	111
Changing your phone settings .....	112
Changing your connectivity settings .....	113
Using memory manager .....	115
Sending and receiving your files using Bluetooth .....	116
Pairing with another Bluetooth device .....	117
Using a Bluetooth headset .....	118

Accessories .....	119
-------------------	-----

Network service .....	120
-----------------------	-----

Technical data .....	120
----------------------	-----

## Guidelines

Guidelines for safe and efficient use .....	122
Trouble Shooting .....	128

## Getting to know your phone


### End/Power key

Ends or rejects a call.  
Turns the phone on/off.  
Press once to return to  
the standby screen.

### Multitasking key

### Call key

Dials a phone number and  
answers incoming calls.

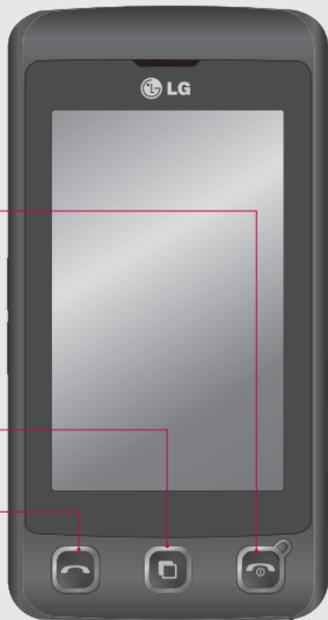

**⚠ WARNING:** Placing a heavy object on the phone or sitting on it while it is in your pocket can damage the phone's LCD and touch screen functionality.



### Charger, Cable, Handsfree connector

**TIP:** To connect the USB cable, wait until the phone has powered up and has registered to the network.

### Side keys

- **When the screen is idle:** volume of key tone.
- **During a call:** volume of the earpiece.
- **When playing a BGM track**
  - **Short press:** controls the volume.



Micro SD memory card socket

Lock/Unlock key

Capture button

Stylus

01

02

03

04


05

06

07

08

## Open view

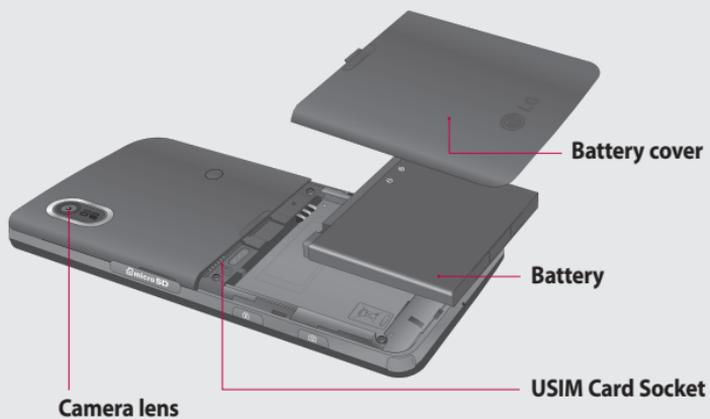

# Installing the USIM and battery

## 1 Remove the battery cover

Slide the battery cover towards the bottom of the phone and away from it.



## 2 Remove the battery

Using the cut-out at the bottom lift it from the battery compartment.



**⚠ WARNING:** Do not use your fingernail when removing the battery.

**⚠ WARNING:** Do not remove the battery when the phone is switched on, as this may damage the phone.

01

02

03

04

05

06

07

08

## Installing the USIM and battery

### 3 Install the USIM card

Slide the USIM card into the USIM card holder making sure that the gold contact area on the card is facing downwards. To remove the USIM card, pull it gently in the opposite direction.



### 4 Install the battery

Insert the top of the battery first into the top edge of the battery compartment. Ensure that the battery contacts align with the terminals on the phone. Press down the bottom of the battery until it clicks into place.



## 5 Charging your phone

Lift and twist the charger socket cover of the on the side of your KP500. Insert the charger and plug it into a mains electricity socket. Your KP500 needs to be charged until "Battery full" appears on screen.



01

02

03

04

05

06

07

08

## Memory card

### Installing a memory card

You can expand the memory space on your phone by using a MicroSD memory card. The KP500 will support up to a 8GB memory card.

**NOTE:** A memory card is an optional accessory.

- 1 Open the memory card slot cover on the right hand edge of the phone.
- 2 Slide the memory card into the slot until it clicks into place.



- 3 Close the cover.

### Formatting the memory card

Your memory card may already be formatted. If your card isn't formatted, you will need to format it before you can begin using it.

- 1 From the standby screen select , then touch  and choose **Phone settings**.
- 2 Touch **Memory manager** then chose **External memory**.
- 3 Touch **Format** and then confirm your choice.
- 4 Enter the password, if one is set, and your card will then be formatted and ready to use.

**TIP!** To change your default storage destination, open Memory manager from the Phone settings menu and select Primary storage settings.

**NOTE:** If your memory card already has content, it will automatically be filed in the correct folder; for example, videos will be stored in the My Videos folder.

## Transferring your contacts

To transfer your contacts from your USIM to your phone:

- 1 From the Communicate tab, select  and choose **Settings**.
- 2 Touch **Copy**.
- 3 Choose **Handset to SIM**.
- 4 Choose **all** or choose names one by one and touch **Copy**.

01

02

03

04

05

06

07

08

# Menu map

Touch  in the standby screen to open a **Top menu**. From here you can access further menus: **Communicate**, **Entertainment**, **Utilities** and **Settings**.



## Communicate

- Dialling
- Speed dials
- Contacts
- Call history
- New message
- New Email
- Messaging



## Entertainment

- Gallery
- My stuff
- Camera
- Video camera
- Muvee studio
- Music
- FM radio
- Games & Apps



## Utilities

- Browser
- Organiser
- Alarms
- Voice recorder
- Drawing Panel
- Tools
- Sim Tool Kit



## Settings

- Profiles
- Screen settings
- Phone settings
- Call settings
- Touch settings
- Bluetooth
- Connectivity

## Your standby screen

Whenever your KP500 is not in use it will return to your home screen. From here you can access all the menu options, make a quick call and view the status of your phone as well as many other things.

### Touch screen tips

The home screen is also a great place to get accustomed to the touch screen.

To select an item, touch the icon accurately. Your KP500 will vibrate slightly when it recognises you've touched an option.

To scroll through lists, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- There's no need to press too hard, the touchscreen is sensitive enough to pick up on a light, yet firm, touch.
- Use the tip of your finger to touch the option you want. Be careful

not to touch any other options around it.

- When the screen back light is off, press the Unlock/Lock key on the right hand side to bring back the home screen.
- Don't cover the phone with a case or cover. The touchscreen won't work with any material covering it.
- There are two types of idle screen. Flick left or right to change your idle screen types on the standby screen.

- 1 **Widget idle** - When you touch , the mobile widget panel appears.
- 2 **Speed dial idle** - When you touch , the speed dial list appears. You can drag and click what you need right away in both idle types.

01

02

03

04

05

06

07

08

# Your standby screen

## Widget idle




Quick keys



Mobile widget

## Speed dial idle



Speed dial list

## The quick keys

The quick keys provide easy, one-touch access to your most used functions.



Touch to bring up the touch dialling pad to make a call. Input the number as you would using a normal key pad and touch **Calls** or press the  hard key.



Touch to open your address book. To search for the number you want to call, enter the name of the contact at the top of the screen using the touchpad. You can also create new contacts and edit existing ones. See page 30 for details.



Touch to access the Messaging options menu. From here you can create a new SMS or MMS, or view your message folder. See page 35 for details.



Touch to open the full Top menu which is divided into four vertical sub-menus. Touch each sub-menu's tab to view further options.

01

02

03

04

05

06

07

08

## Your standby screen

### The status bar

The status bar uses various icons to indicate things like signal strength, new messages and battery life, as well as telling you whether your Bluetooth or GPRS is active.


Below is a table which explains the meaning of the icons you're most likely to see in the status bar.

Icon	Description
	Multitasking
	Network signal strength (number of bars will vary)
	No network signal
	Remaining battery life
	Battery empty
	New text message
	New voice message
	Message inbox is full
	Message sending failed

Icon	Description
	Multimedia message sending failed
	An alarm is set
	Customised Profile in use
	Normal profile in use
	Outdoor profile in use
	Silent profile in use
	Headset profile in use
	Calls are diverted
	EDGE in use
	Roaming
	Flight mode is on
	Bluetooth is active
	BGM play
	BGM pause
	Memory card is enable to use

## Changing your Status from the status bar

Touch the status bar to open the Status Summary. It shows the current Time, Network, SVC ID, Battery, Handset memory, External Memory, Profile, MP3 and Bluetooth status. Here you can set Profile type, play/pause MP3 and activate/deactivate Bluetooth.

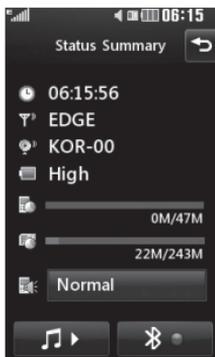

## Using the Multitasking function

Press the multitasking hard key  to open the Multitasking menu. From here you can view all the applications you have running and access them with one touch.

When you have an application running in the background (e.g. a game or the FM radio),  will appear in the status bar.

01

02

03

04

05

06

07

08

# Calls

## Making a call

- 1 Touch  to open the keypad.
- 2 Key in the number using the keypad. To delete a digit touch the clear key.
- 3 Press the  Hard key or touch  to initiate the call.
- 4 To end the call press the  hard key.

**TIP!** To enter + for making an international call, press and hold .

**TIP!** Press the lock/unlock hard key  to lock the touchscreen to prevent calls being made by mistake.

**TIP!** To bring up the keypad during a call, press the .

**TIP!** Touch to unlock. You can unlock by touching the button for a while until the screen is able to work or press the Unlock hard key .

**TIP!** You can send a message and search contacts by tapping .

## Making a call from your contacts

- 1 From the standby screen touch  to open the address book.
- 2 Enter the first few letters of the contact you would like to call.
- 3 From the filtered list, touch the contact you'd like to call and select the number to use if you have more than one saved.
- 4 Press the  Hard key or touch  to initiate the call.

## Answering and rejecting a call

When your phone rings press the  hard key or touch  to answer the call.

Tap  to mute the ringing. This is great if you've forgotten to change your profile to Silent for a meeting. Press the  hard or touch  to reject an incoming call.

You can send a message to notify why you don't receive an incoming call using "Excuse message" before you reject an incoming call

01

02

03

04

05


06

07

08

# Calls

## In-call options

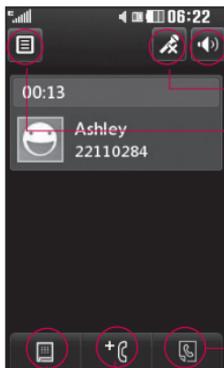

**Speaker** - Touch  to turn on the speaker phone.

**Mute** - Touch  to turn off the microphone so the person you are talking to cannot hear you.

**Options** - Choose from a list of further in-call options, including **Go to messages**, so you can check your messages, Go to contacts to add or search contacts during a call. You can also end the call from here by touching **End call**.

 - Choose to search your contacts during a call.

+  - Choose to add another person to the call.

 - Choose to open a numerical keypad for navigating menus with numbered options. For example, when dialling call centres or other automated telephone services.

**TIP!** To scroll through a list of options or your list of contacts, touch the last item visible and slide your finger up the screen. The list will move up so more items become visible.

## Adjusting the call volume

To adjust the volume during a call, use the up and down button on the left edge of the phone.

## Speed dialling

You can assign a frequently-called contact to a speed dial number.

- 1 From the standby screen touch  and select  and tap .
- 2 Your Voicemail is already set to speed dial 1. You cannot change this. Touch any other number to assign it a speed dial contact.
- 3 Your address book will open. Select the contact you'd like to assign to that number by touching their phone number once. To find a contact tap the search field box and enter the first letter of the name of the contact required.

## Making a second call

- 1 During your initial call, touch  and select the number you want to call.
- 2 Dial the number or search your contacts (see **Making a call** on page 22 for details).
- 3 Press  to connect the call.
- 4 Both calls will be displayed on the call screen. Your initial call will be locked and the caller put on hold.
- 5 To change between the calls, touch  and choose **Swap call** or press the number of the held call.
- 6 To end one or both calls press  and select **End** followed by **All**, **Held** or **Active**.

01

02

03

04

05

06

07

08

# Calls

**TIP!** You can combine your calls by selecting **Accept** then **Join**. Check that your network provider supports conference calling.

**NOTE:** You will be charged for each call you make.

## Turning off DTMF

DTMF allows you to use numerical commands to navigate menus within automated calls. DTMF is switched on as default.

To turn it off during a call (to make a note of a number for example) touch  and select **DTMF off**.

## Viewing your call logs

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Touch  and select  and tap .

Choose to view:

**All** - View a complete list of all your dialled, received and missed calls.

**Dialled**  - View a list of all the numbers you have called.

**Received**  - View a list of all the numbers that have called you.

**Missed**  - View a list of all the calls you have missed.

**TIP!** From any call log touch  and **Delete all** to delete all the recorded items.

**TIP!** Touch any single call log entry to view the date, time and duration of the call.

## Using call divert

- 1 Touch , select  and choose .
- 2 Touch **Call divert**.
- 3 Choose whether to divert all calls, when the line is busy, when there is no answer or when you are not reachable.
- 4 Input the number you'd like to divert to.
- 5 Touch **Request** to activate.

**NOTE:** Charges are incurred for diverting calls. Please contact your network provider for details.

**TIP!** To turn off all call diverts, choose **Deactivate all** from the **Call divert** menu.

## Using call barring

- 1 Touch , select  and choose .
- 2 Touch **Call barring**.
- 3 Choose any or all of the six options:

**All outgoing**

**Outgoing international**

**Outgoing international calls  
except home country**

**All incoming**

**Incoming when abroad**

**Deactivate all**

01

02

03

04

05

06

07

08

## Calls

- 4 Enter the call barring password. Please check with your network operator for this service.

**TIP!** Select **Fixed dial number** to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code from your operator. Only numbers included in the fixed dial list can be called from your phone.

### Changing the common call setting

- 1 Touch , select  and choose .
- 2 Touch **Common settings**. From here you can amend the settings for:

**Call reject** - Slide the switch to **On** to highlight the Reject list. You can touch the text box to choose from all calls, specific contacts or groups, or those from unregistered numbers (those not in your contacts). Touch **Save** to change the setting.

**Send my number** - Choose whether your number will be displayed when you call someone.

**Auto redial** - Slide the switch left for **On** or right for **Off**.

**Answer mode** - Choose whether to answer the phone using the send key or any key.

**Minute minder** - Slide the switch left to **On** to hear a tone every minute during a call.

**BT answer mode** - Select **Hands-free** to be able to answer a call using a Bluetooth headset, or select **Handset** to press a key on the handset to answer a call.

**Save new number** - Select **Yes** to save a new number.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

01

02

03

04

05

06

07

08

# Contacts

## Searching for a contact

There are two ways to search for a contact:

### From the standby screen

- 1 From the standby screen touch  to open the address book. Select the contact from the list that you want to make a call.
- 2 Touch  or press the  hard key to initiate the call.

### From the main menu

- 1 Touch , select .
- 2 Touch  and select **Search**.
- 3 You see a list of contacts, typing in the first letter of a contact's name will jump the menu to that alphabetical area of the list.

**TIP!** The alphabetical keypad is displayed once you tap the blank square.

**TIP!** To scroll through your list of contacts, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

## Adding a new contact

- 1 From the standby screen touch  and touch **Add contact**.
- 2 Choose whether to save the contact to your **Handset** or **SIM**.
- 3 Enter the first and last name of your new contact. You do not have to enter both, but you must enter one or the other.

- 4 You can enter up to five different numbers per contact. Each entry has a preset type **Mobile, Home, Office, Pager, Fax, and General**. When you have finished, touch **Close**.
- 5 Add an email address.
- 6 Assign the contact to one or more groups. Choose from **No group, Family, Friends, Colleagues, School** or **VIP**.
- 7 You can also add a **Ringtone, Birthday, Anniversary, Homepage, Home address, Company name, Job title, Company address** and a **Memo**.
- 8 Touch **Save** to save the contact.

**TIP!** You can create customised groups for your contacts, see **Creating a group** on page 32.

## Contact options

There are many things you can do when viewing a contact. Here's how to access and use the options menu:

- 1 Open the contact you'd like to use. See **Searching for a contact** on page 30.
- 2 You can call or send a message directly from here.
- 3 Press  to open the list of options.

**Edit** - Change any of the contact's details.

**Delete** - Delete the contact. Touch **Yes** if you are sure.

**Copy or Move to USIM/Handset** - Choose to move or copy to the USIM card or handset (depending on where you originally saved the contact).

01

02

03

04

05

06

07

08

## Contacts

**Send business card** - Send the contact's details to another person as a business card. Choose to send as a **Text message**, **Multimedia message**, **Email** or via **Bluetooth**.

**TIP! Send message** - Send a message to the contact. If the contact has an email address, select whether you'd like to send an email or SMS/MMS. See page 35 for details on how to send messages.

### Creating a group

- 1 Touch  and select .
- 2 Touch  then **Groups**.
- 3 Touch .
- 4 Select **Add group**.
- 5 Enter a name for your new group. You can also assign a ringtone to the group.
- 6 Touch **Save**.

**NOTE:** If you delete a group, the contacts which were assigned to that group will not be lost. They will remain in your address book.

**TIP!** You can edit an existing group by highlighting it and touching . Choose **Add members** to the group from your contacts, assign a Group ringtone, Rename the group or Delete a group.

## Changing your contact settings

You can adapt your contact settings so that your address book suits your own preferences.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 From the standby screen touch  and select .
- 2 Touch  and select **Settings**.
- 3 From here you can adjust the following settings:

**Contact list settings** - Choose whether to view contacts saved to both your **Handset & USIM**, **Handset** only or **USIM** only  
You can also choose to show the first name or last name of a contact first.

**Copy** - Copy your contacts from your USIM to your handset or from your handset to your USIM. Choose to do this one at a time, or all at once. If you select one at a time, you'll need to select each contact to copy one by one.

**Move** - This works in the same way as Copy, but the contact will only be saved to the location you've moved it to. So if you move a contact from the USIM to the handset it will be deleted from the USIM memory.

01

02

03

04

05

06

07

08

# Contacts

## Send all contacts via Bluetooth

- Send all of your contacts to another device using Bluetooth. You will be prompted to turn on Bluetooth if you select this option.

## Backup and Restore contacts

- Backup and restore contacts to the Memory Card.

**Clear contacts** - Delete all your contacts. Touch **Yes** if you are sure you want to wipe your address book.

## Viewing information

- 1 From the standby screen touch  and select .
- 2 Touch  and select **Information**.
- 3 From here you can view your **Service dial numbers**, your **Own number**, your **Memory info**. (how much memory space you've got left) and **My business card**.

**TIP!** If you've yet to add a business card for yourself, select **My business card** and enter all your details as you would for any contact. Touch **Save** to finish.

# Messaging

## Messaging

Your KP500 combines SMS, MMS and email into one intuitive and easy to use menu.

There are two ways to enter the messaging centre:

- 1 Touch  from the standby screen.
- 2 Touch  from the standby screen, then select  and choose .

## Sending a message

- 1 Touch  to open a blank message.
- 2 From here you can send an SMS or MMS. To send an email, touch  from the standby screen, then select  and . See page 40 for details.
- 3 Touch **Insert**, to add an image, video, sound or template.

- 5 Touch **To(1)** at the top of the screen to enter the recipient's number, or touch the search icon to open your address book. You can add multiple contacts. Touch **Send** when ready.

 **WARNING:** You will be charged per 1 page text message for each person that you send the message to.

 **WARNING:** If an image, video or sound is added to an SMS it will be automatically convert to an MMS and you will be charged accordingly.

**TIP!** Quick reply - Send a reply promptly to the selected message using a template.

01

02

03

04

05

06

07

08

# Messaging

## Entering text

There are five ways to enter text:

Keypad, Keyboard, Handwriting-Screen, Handwriting-Box, Handwriting-Double Box.

You can choose your input method by tapping  and **Input method**.

Tap the screen once, the keyboard appears.

 Touch to turn on T9 predictive text.

 You can choose writing languages.

 Tap to change numbers, symbols and text keypad.

Use  to scroll through the different keyboard types in each text entry mode (for example, capitals or lowercase).

## T9 predictive

In T9 mode you will see .

T9 mode uses a built-in dictionary to recognise words you're writing based on the key sequences you touch. Simply touch the number key associated with the letter you want to enter, and the dictionary will predict the word you want to use.

For example, press 8, 3, 5, 3, 7, 4, 6, 6, 3 to write 'telephone'.

## Abc manual

In Abc mode you will see .

In Abc mode you must touch the key repeatedly to enter a letter. For example, to write 'hello', touch 4 twice, 3 twice, 5 three times, 5 three times again, then 6 three times.

## Keyboard

In Keyboard mode the screen flips to landscape and a full keyboard appears on screen.

Simply touch each letter to write your message and press:

 to switch to upper case



**TIP!** Keyboard mode predicts and shows what you will type in next. These words are predicted based on the sentences you have typed in so far. If you do not wish to use the suggested words, keep typing in new words. If you wish to use the suggested words, press the space bar to confirm them.

01

02

03

04

05

06

07

08

# Messaging

## Handwriting recognition

In Handwriting mode you simply write on the screen and your KP500 will convert your handwriting into your message. Select **Screen** or **Box** depending on your preferred view.

**TIP!** You may find it easier to use the stylus in this mode, please remember to press lightly to protect your screen from damage.

Handwriting recognition translates stylus gestures into letters, numbers or other character, and displays these characters as text. Handwriting recognition is only active where text can be entered.

**Note:** Most letters can be written using different stroke styles. The position on the screen decides case, not the style.

## Alphabet

If you select capital letter mode (ABC), letters you type will be inserted as capital letters even if you write in small letters, and vice versa.

Letter	Strokes
A	A A' a a'
B	B B b b'
C	c c'
D	D D d d'
E	E E e e'
F	F F f f'
G	G G g g'
H	H H h h'
I	I I i i'
J	J J j j'
K	K K k k'
L	L l l'

Letter	Strokes
M	M M m m
N	N N n n
O	O O o o
P	P P p p
Q	Q Q q q
R	R R r
S	S s
T	T T t t
U	U u u
V	V v
W	W w w
X	X x
Y	Y y y y
Z	Z z
ß	ß

## Numbers

Numbers are written above the arrow.

Number	Strokes
0	0 0
1	1 1 1 1 1
2	2 2 2
3	3 3
4	4 4 4 4
5	5 5 5 5
6	6
7	7 7 7 7
8	8 8 8 8
9	9 9 9 9

01

02

03

04

05

06

07

08

## Messaging

### Setting up your email

You can stay in touch on the move using email on your KP500. It's quick and simple to set up a POP3 or IMAP4 email account.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then tap .
- 2 Select  then scroll menu to **Settings**.
- 3 Touch **Email** then **Email accounts**.
- 4 Touch **Add Account**.
- 5 Setup Wizard will help you set up your email settings.

**Email address** - Enter your email address.

**Password** - Enter the account password.

**Username** - Enter your account user ID as supplied by your email provider.

**Mailbox type** - Select the internet protocol type used to transfer your email, IMAP4 or POP3.

**Incoming server** - Enter your incoming (POP3 or IMAP4) mail server name or IP address.

**Outgoing server** - Enter your outgoing(SMTP) mail server name or IP address. This may be the same server as for incoming mail.

**SMTP authentication** - Turn on SMTP authentication if the outgoing server requires user name and password to send email.

**Account name** - Enter the mailbox name that you wish to appear as the account name for the Mailbox.

Now your account is set up, it will appear in the list of accounts in your Email folder.

**6** You can check and edit settings by selecting the account in the list. You can also check the additional settings that were filled in automatically when you created the account.

**Reply email address** - Enter the 'reply to' email address.

**Maximum receive size** - Choose the size limit of your emails, the maximum is 1MB.

**Save sent mail into** - Select whether to save sent emails (an option when the mailbox type is set to IMAP4). When the mailbox type is POP3, sent mails are always saved into handset.

01

02

03

04

05

06

07

08

## Messaging

**Access points** - Choose your Internet access point.

**Auto retrieve** - Choose whether to retrieve your new emails automatically.

**Advanced settings** - Choose whether to use the advanced settings.

**SMTP port number** - Normally, this will be 25.

**SMTP TLS/SSL** - Choose whether to use SSL for outgoing server.

**Incoming server port** - Normally, this is 110 for POP3 accounts and 143 for IMAP4 accounts.

**Incoming TLS/SSL** - Choose whether to use SSL for incoming server.

**SMTP Username** - Enter the SMTP username.

**SMTP Password** - Enter the SMTP password.

**APOP secure login** - Choose to activate APOP secure login for a POP3 account. IMAP4 accounts are always set to off.

- 7** You can change your default email account by touching **Activate**.

## Retrieving your email

You can automatically or manually check your account for new emails. See 'Changing your email settings' on page 44 to check automatically.

To check manually:

- 1 Touch  then select  and .
- 2 Touch **Mailbox**.
- 3 Touch the account you want to use then .
- 4 Choose **Retrieve** and your KP500 will connect to your email account and retrieve your new messages.

## Sending an email using your new account

- 1 Touch **New Email** in the **Communicate** menu and a new email will open.
- 2 You can enter the recipient's address and write your message. You can also attach images, videos, sounds or other file types.
- 3 Touch **Send** and your email will be sent.

**TIP!** You can upload Word, Excel, PowerPoint and PDF documents to your KP500 so you can review them on the move.

01

02

03

04

05

06

07

08

# Messaging

## Changing your email settings

You can change your email settings according to your own preferences.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then select  and .
- 2 Touch **Settings** and **Email** and then you can adapt the following settings:

**Allow reply Email** - Choose to allow the sending of 'read, confirmation' messages.

**Request reply Email** - Choose whether to request read confirmation messages.

**Retrieve interval** - Choose how often your KP500 checks for new email messages.

**Retrieve amount** - Choose the number of emails to be retrieved at any one time.

**Include message in Fwd & Reply** - Choose to include the original message in your reply.

**Include attachment** - Choose to include the original attachment in any reply.

**Auto Retrieval in Roaming** - Choose whether to retrieve your messages automatically when abroad (roaming).

**TIP!** Costs for retrieving email may be higher when roaming. Check with your network supplier.

**New email notification** - Choose whether to be alerted to new emails.

**Signature** - Create an email signature and switch this feature on.

**Priority** - Choose the priority level of your email messages.

## Message folders

You'll recognise the folder structure used on your KP500, which is fairly self-explanatory.

**Inbox** - All the messages you receive are placed into your inbox. From here you can view, delete and more, see **Managing your messages** below for details.

**Mailbox** - All the emails you receive on your KP500 will be placed in your mailbox.

**Drafts** - If you don't have time to finish writing a message, you can save what you've done so far here.

**Outbox** - This is a temporary storage folder while messages are being sent.

**Sent items** - All the messages you have sent are placed in this folder.

**My Folders** - Create folders to store your messages.

01

02

03

04

05

06

07

08

# Messaging

## Managing your messages

You can use your Inbox to manage your messages.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then select  and .
- 2 Select **Inbox**.
- 3 Touch  and then choose to:
  - Delete** - Delete marked messages.
  - Create new message** - Open a new blank message or email.
  - Move to My folders** - Move the marked messages to My folders.

**Filter** - View your message by type. This will group SMS separately from MMS.

**Delete all** - Delete all of the messages.

If you see the message **No space for USIM messages** you should delete some messages on the USIM.

If you see the message **No space for messages** you should delete some messages to free up memory space.

## Using templates

Create templates for the SMS and MMS messages you send most frequently. You'll find some templates already on your phone, you can edit these if you wish.

- 1 Touch  then choose **Templates** on the **Communicate** menu.
- 2 Choose **Text templates** or **Multimedia templates**. You can then touch  to **Add new**, **Delete** or **Delete all** templates.
- 3 Touch **Add template** to create a new template.
- 4 You can view the template by selecting it on the list and edit it by touching on the view screen.

## Using emoticons

Liven up your messages using emoticons. You'll find some commonly used emoticons already on your phone.

- 1 Touch  then choose **Emoticons** on the **Communicate** menu.
- 2 Touch  to **Add new**, **Delete** or **Delete all** emoticons.
- 3 Touch "Add emoticon" to create a new emoticon.
- 4 You can view the emoticon by selecting it on the list and edit it by touching on the view screen.

01

02

03

04

05

06

07

08

# Messaging

## Changing your text message settings

Your KP500 message settings are pre-defined so that you can send messages immediately. These settings can be changed according to your preferences.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Touch  then choose **Settings** on the **Communicate** menu. Select **Text message**. You can make changes to:

**Text message centre** - Enter the details of your message centre.

**Delivery report** - Slide the switch left to receive confirmation that your messages have been delivered.

**Validity period** - Choose how long your messages are stored at the message centre.

**Message types** - Convert your text into **Text, Voice, Fax, X.400** or **Email**.

**Character encoding** - Choose how your characters are encoded. This impacts the size of your messages and therefore data charges.

**Send long text as** - Choose to send long messages as Multiple SMS or as MMS.

## Changing your multimedia message settings

Your KP500 message settings are pre-defined so that you can send messages immediately. These settings can be changed according to your preferences.

Touch , select  then . Chose **Settings** and **Multimedia message**. You can make changes to:  
**Retrieval mode** - Choose **Home** or **Roaming network**. If you then choose Manual you will receive only notifications of MMS and you can then decide whether to download them in full.

**Delivery report** - Choose to allow and/or request a delivery report.

**Read report** - Choose to allow and/or request a reply report.

**Priority** - Choose the priority level of your MMS.

**Validity period** - Choose how long your message is stored at the message centre.

**Slide duration** - Choose how long your slides appear on screen.

**Creation mode** - Choose your message mode.

**Delivery time** - Choose how long before a message is delivered.

**Multi msg centre** - Enter the details of your message centre.

01

02

03

04

05

06

07

08

# Messaging

## Changing your other settings

Touch  / , select , choose

**Settings** on the **Messaging** menu then:

**Voicemail** - Touch  to add a new Voicemail service or tap on "Add voice mail". Contact your network operator for more information on the service they provide.

**Service message** - Choose to receive or block service messages. You can also set your message security by creating trusted and untrusted lists of senders.

**Info service** - Choose your reception status, language and other settings.


# Camera

## Taking a quick photo

- 1 Press the  key on the right side of the phone briefly.
- 2 The viewfinder will appear on screen.
- 3 Holding the phone horizontally, point the lens towards the subject of the photo.
- 4 Position the phone so you can see the subject of your photo in the preview screen.
- 5 When the camera has focused on your subject, either press the  on the side of the phone firmly or press the red box on the lower right of the screen to take the photo.

## After you've taken your photo

Your captured photo will appear on screen. The name of the image runs along the bottom of the screen together with six icons down the right side.

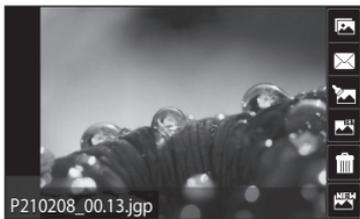

-  Touch to move to your gallery.
-  Touch to send the photo as a message, e-mail or Bluetooth. See page 35 for Sending a message, and page 116 for Sending and receiving your files using Bluetooth.
-  Touch to edit the photo.
-  Touch to set the picture you have taken as Wallpaper.
-  Touch to delete the photo you have just taken and confirm by touching **Yes**. The viewfinder will reappear.
-  Touch to take another photo straightaway. Your current photo will be saved.

01

02

03

04

05


06

07

08

# Camera

## Getting to know the viewfinder

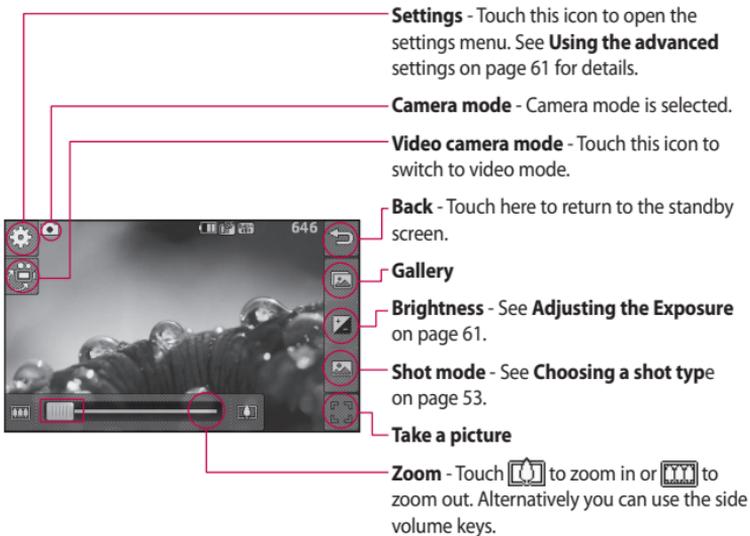

**TIP!** You can bring up the options by tapping the screen. They auto turn off after a few seconds.

**NOTE:** Image size should be 640\*480/  
400\*240/ 320\*240 to use zoom.

## Choosing a shot type

1 Touch  to open the available shot types.

2 Choose from two options:

**Normal shot** - This is the default shot type, the photo will be taken in the normal way, as outlined in taking a quick photo.

**Burst shot** - This enables you to take 3/6/9 shots automatically in very quick succession.

## Adjusting the exposure

Exposure defines the difference between light and dark (contrast) in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

1 Touch .

2 Slide the contrast indicator along the bar - left for a lower exposure, hazier image or right for a higher exposure, sharper image.

01

02

03

04

05

06

07

08

# Camera


## Using continuous shot mode

Continuous shot mode is great for taking photos of moving objects or at sporting events.

- 1 Touch  to open the available shot types and select **Burst shot**.
- 2 Select the shot count that you would like to take continuously.
- 3 Position the subject in the viewfinder and press the capture button as you would to take a normal photo.
- 4 The camera will take 3/6/9 pictures in quick sequence.

## Using the advanced settings

From the viewfinder touch  to open all the advanced settings options.

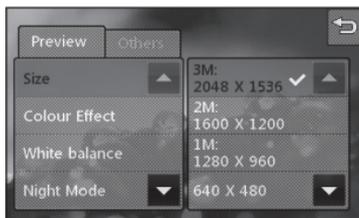

### Preview settings

**Size** - Change the size of the photo to save on memory space or take a picture preset to the correct size for contact. See **Changing the image size** on page 56.

**Colour Effect** - Choose a colour tone to apply to the photo you're taking. See **Choosing a colour effect** on page 56.

**White balance** - Choose from Auto, Incandescent, Sunny, Fluorescent or Cloudy.

**Night mode** - Useful to use at dark place.

**Self-timer** - The self-timer allows you to set a delay after the capture button is pressed before the camera takes the picture. Choose from **3 seconds, 5 seconds** or **10 seconds**. Great for that group photo you want to be part of.

**Quality** - Choose between **Super fine, Fine** and **Normal**. The finer the quality the sharper a photo will be, but the file size will increase. This means you'll be able to store fewer photos in your memory.

**View mode** - Choose from Full screen or Full image. In Full screen some clipping of the image may occur.

## Other settings

**Memory** - Choose whether to save your photos to the Handset memory or to the External memory.

**Shutter sound** - Select one of the three shutter sounds.

**Grid screen** - Choose from Off, Simple cross or Trisection

**Reset settings** - Reset all the camera settings.

**TIP!** When you exit the camera all your settings will return to default, except image size and image quality. Any non-default settings you require will need to be reset, for example colour tone. Check them before you shoot your next photo.

01

02

03

04

05

06

07

08

# Camera

**TIP!** The settings menu is superimposed over the viewfinder, so when you change elements of the image colour or quality you'll be able to see the image change in preview behind the settings menu.

## Changing the image size

The more pixels, the larger the file size, which in turn means they take up more of your memory. If you want to fit more pictures on to your phone you can alter the pixel number to make the file size smaller.

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Size** from the Preview menu.

- 3 Select a pixel value from the five numerical options (**3M: 2048x1536, 2M: 1600x1200, 1M: 1280x960, 640x480, 400x240(W), 320x240**) or choose the preset:

**Contacts** - This sets the camera to take a photo the perfect size to be added to a phone contact.

## Choosing a colour effect

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Colour Effect** from the Preview menu.
- 3 There are five colour tone options: **Off, Black & White, Negative** or **Sepia**.

**TIP!** You can change a photo taken in colour to black and white or sepia after it's taken, but you cannot change a picture taken in black and white or sepia back to colour.

## Viewing your saved photos

- 1 You can access your saved photo's from within the camera mode. Simply touch  and your gallery will appear on screen.

01

02

03

04

05

06

07

08


## Video camera

### Shooting a quick video

- 1 Press the camera key on the right side of the phone.
- 2 On the Camera preview mode touch the Video camera icon  in the view finder to switch to video mode. The video camera's viewfinder will appear on screen.
- 3 Holding the phone horizontally, point the lens towards the subject of the video.
- 4 Press the capture button once to start recording. Or press the red dot  at the bottom right of the screen.
- 5 **Rec** will appear at the top of the viewfinder and a timer at the bottom showing the length of your video.
- 6 To pause the video touch  and resume by selecting .
- 7 Touch  on screen or press the capture button a second time to stop recording.

## After you've shot your video

A still image representing your captured video will appear on screen. The name of the video runs along the bottom of the screen together with five icons down the right side .

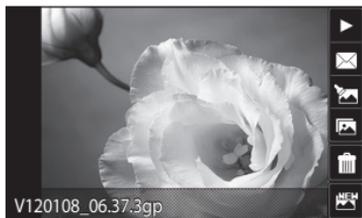

 Touch to play the video.

 Touch to send the video as a **Message or Email** or by **Bluetooth**. See page 35 for **Sending messages**, or page 116 for **Sending and receiving your files using Bluetooth**.

 Touch to edit the video.

 Touch to view a gallery of saved videos and images.

 Touch to delete the video you have just captured and confirm by touching **Yes**. The viewfinder will reappear.

 Touch to shoot another video straight away. Your current video will be saved.

01

02

03

04

05


06

07

08

# Video camera

## Getting to know the viewfinder

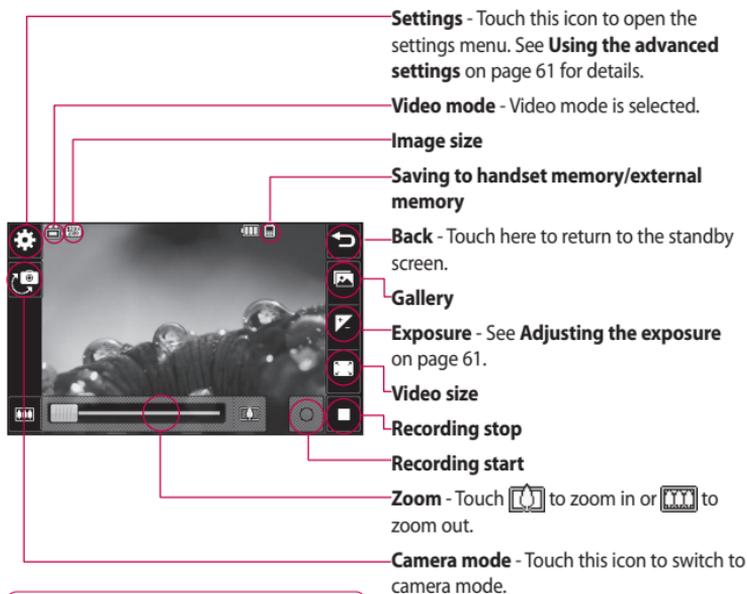

**TIP!** You can close all the shortcut options for a clearer viewfinder screen. Simply touch the centre of the viewfinder once. To recall the options touch the screen again.


## Adjusting the Exposure

Exposure defines the difference between light and dark (contrast) in an video. A low contrast image will appear foggy, whereas a high contrast video will appear much sharper.

- 1 Touch .
- 2 Slide the exposure indicator along the bar, left for a lower exposure, hazier video, or right for a higher contrast, sharper video.

## Using the advanced settings

From the viewfinder touch **Settings** to open all the advanced settings options.

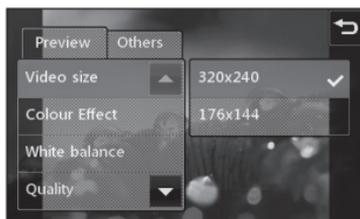

01

02

03

04

05

06

07

08

### Preview settings

**Video size** - Change the size of the video to save on memory space. See **Changing the video image size** on page 63.

**Colour Effect** - Choose a colour tone to apply to the video you're taking. See **Choosing a colour tone** on page 63.

## Video camera

**White balance** - The white balance ensures that any white in your videos is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto, Incandescent, Sunny, Fluorescent** or **Cloudy**.

**Quality** - Choose between **Super fine, Fine** and **Normal**. The finer the quality the sharper a video will be, but the file size will increase as a result, which means you'll be able to store fewer videos in the phone's memory.

**Set time** - Set a duration limit for your video. Choose from **No limit**, or **MMS** to limit the size so that you can send the video as an MMS.

**View mode** - Choose from Full screen or Full image. In Full screen some clipping of the image may occur.

**TIP!** If you choose MMS duration, try choosing a lower image quality to enable you to shoot a longer video.

### Other settings

**Memory** - Choose whether to save your videos to the **Handset memory** or to the **External memory**.

**Voice** - Choose Mute to record a video without sound.

**Reset settings** - Reset all the video camera settings.

## Changing the video image size

The more pixels, the larger the file size, which in turn means they take up more memory. If you want to fit more videos on to your phone you can alter the pixel number to make the file size smaller.

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Video size** from the Preview menu.
- 3 Select a pixel value from the two options:  
 **320x240** - Large image size, therefore larger file size. Up to 24 fps are available for video play back, up to 12 fps are available for video recording.  
 **176x144** - Small image size and therefore smaller file size. Up to 15 fps are available for video play back.

- 4 Select the size option you'd like to use.

**TIP!** For video format conversion software, see the CD you received with your KP500.

## Choosing a colour tone

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Colour Effect** from the settings menu.
- 3 There are five colour tone options, **Off** (Normal), **Black & White**, **Negative**, **Sepia**.
- 4 Touch the colour tone you'd like to use.

**TIP!** You can change a video shot in colour to black and white or sepia after it's taken, but you cannot change a video shot in black and white or sepia back to colour.

01

02

03

04

05

06

07

08

## Video camera

### Watching your saved videos

- 1 In the viewfinder touch .
- 2 Your gallery will appear on screen.
- 3 Touch the video you want to view once to bring it to the front of the gallery.
- 4 Touch the video a second time to open it fully.

# Your photos and videos

## Viewing your photos and videos

- 1 Touch  on your camera preview screen.
- 2 Your gallery will appear on screen.
- 3 Touch the video or photo twice to open it fully.
- 4 To play the video touch . To pause playback touch .



**TIP!** Flick left or right to view other photos or videos.

**TIP!** To delete a photo or video, open it and select . Touch **Yes** to confirm.

## Using zoom when viewing a photo

To zoom in press  repeatedly. To zoom out press . Use the thumbnail in the bottom right corner to move the focus area.

## Adjusting the volume when viewing a video

To adjust the volume of the audio on a video whilst it is playing, slide the marker up and down the volume bar on the left side of the screen.

01

02

03

04

05

06

07

08

## Your photos and videos

### Capturing an image from a video

- 1 Select the video you would like to take an image from.
- 2 Touch **||** to pause the video on the frame you'd like to convert to an image and touch the right side of the screen to open the options menu.
- 3 From the options menu select .
- 4 The image will appear on screen, with its assigned image name.
- 5 Touch the image then  to return to the gallery.
- 6 The image will be saved in your Media Album folder and appear in the gallery. You need to exit the gallery and then re-open it for this to appear.

 **WARNING:** Some functions will not work properly if the multimedia file has not been recorded on the phone.

### Viewing your photos as a slide show

Slideshow mode will show all the photos in your gallery one at a time as a slideshow. Videos can not be viewed as a slideshow.

- 1 Touch the photo twice with  which you would like to begin the slide show.
- 2 Select .
- 3 The slideshow will begin.



There are options within slideshows:



Touch to show random.



Touch to pause the slideshow on a particular photo.



Touch again to resume playback.



Touch to increase or decrease the speed of the slideshow.

## Setting a photo as wallpaper

- 1 Touch the photo you would like to set as wallpaper twice to open it. Turn the phone to landscape.
- 2 Touch the right side of the screen to open the options menu.
- 3 Touch .
- 4 The screen will switch to portrait mode. You can then change the size of the picture.
- 5 When you are happy with the picture touch **Set**.

01

02

03

04

05

06

07

08

## Your photos and videos

### Editing your photos

There are loads of great things you can do to your photos to change them, add to them or liven them up a little.

- 1 Open the photo you'd like to edit and touch  to bring up the options.
- 2 Touch the icons to adapt your photo:

 Crop your photo. Choose a square or circular crop area and move your finger across the screen to select the area.

 Draw something on your photo freehand. Select the thickness of the line from the four options and the colour you would like to use.

**T** Put writing on the picture. See **Adding text to a photo** on page 69.

 Decorate your photo with stamps. Choose from the different stamps available and touch your photo wherever you'd like them to be.

 Erase whatever you draw.

 Save the changes you have made to the photos. Select to save the changes over the **Original file**, or as a **New file**. If you select **New file** enter a file name.

 Undo the last **Effect** or edit you made to the photo.

 Touch to open further effect options including **Rotate**. There are also more advanced editing options. See **Resize, Morphing, Colour Accent, Add images** etc.

 See **Adding an effect to a photo** on page 70.



 Touch to return to the gallery.

## Adding text to a photo

- 1 From the editing screen, touch **T**.
- 2 Select **Signature** to add unframed text or choose one of the speech bubble shapes.
- 3 Enter your text using the keypad and touch **Save**.
- 4 Move the text by touching it and sliding it to the place you'd like it to be.

01

02

03

04

05

06

07

08

## Your photos and videos

### Adding an effect to a photo

- 1 From the editing screen, touch



- 2 Choose to apply any of the six options to the photo:

**Face beautify** - Automatically detect a face in the image and brighten it up.

**Tunnel effect** - Lomo camera effect.

**Colour negative** - Colour negative effect.

**Black and white** - Black and white colour effect.

**Sepia** - Sepia effect.

**Blur** - Apply a blurred effect.

**Sharpen** - Move the marker along the bar to sharpen the focus of the photo. Select **OK** icon to apply the changes or choose to cancel.

**Mosaic blur** - Touch to apply a blurred mosaic effect to the photo.

**Oil painting** - Oil painting effect.

**Sketch** - Apply an effect to make the picture look like a sketch.

**Emboss** - Emboss effect.

**Solarize** - Change the effect of exposure to the light

**Vivid** - An effect of clearness and brilliance.

**Moonlight** - Change the light to look like moonlight.

**Antique** - An old image effect.

**Glow** - A light beam effect.

**Cartoon** - A cartoon effect.

**Water color** - A water color effect.

- 3 To undo an effect simply touch **Undo** .

**TIP!** You can add more than one effect to a photo, except for a colour effect.

### Morphing a photo

Morphing a photo is great for changing the facial expressions of friends, or just for distorting a photo for artistic effect.

- 1 From the editing screen touch .
- 2 Choose **Morphing** and four crosses will appear on the photo.
- 3 Move the crosses around the photo so they are on the part you'd like to morph. For example, if you are morphing a face, place a cross on the outside corner of each eye and one each side of the lips.
- 4 Select a face to represent how you'd like to morph the photo.
- 5 Select **OK** to save the changes.

01

02

03

04

05

06

07

08

## Your photos and videos

### Adding a colour accent to a photo

- 1 From the editing screen, touch .
- 2 Choose **Colour Accent**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is of the same or similar colour. For example, someone's hair or the colour of their jumper.
- 4 Touch **OK**.
- 5 All colour will be removed from the photo, apart from the section marked for colour accenting.
- 6 Alter the intensity of the accenting by sliding the marker up or down the intensity bar.
- 7 Select **Save** to save the changes.

### Swapping the colours in a photo

- 1 From the editing screen, touch .
- 2 Choose **Colour swapping**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is of the same or similar colour. For example, someone's hair or the colour of their jumper.
- 4 Select a colour.
- 5 Press **OK**.
- 6 The part of the photo selected for colour accenting will change to the selected colour.
- 7 Select **Save** to save the changes.

## Trimming the length of your video

- 1 Open the video you'd like to edit, select and touch the screen to bring up the options.
- 2 Select and choose **Trim**.
- 3 Touch and mark the new start and end points using .
- 4 Touch **Play cropped** to ensure you are happy with the new cut.
- 5 Touch **Save** or, alternatively, touch to return to the gallery and discard the changes.



## Merging two videos together

- 1 Open the video you'd like to edit, select and touch the screen to bring up the options.
- 2 Select and choose **Video merge**.
- 3 The **My stuff** folder will open, select either **My Videos** or **My memory card** (if fitted). Choose the video you would like to merge and touch **Select**.
- 4 Touch and slide the photo to merge it to the end or the beginning of the video.
- 5 Touch **Effect** to choose how the videos merge together: **None**, **Pan zoom**, **Oval**, **Uncover**, **Blind**, **Checker board**, **Dissolve**, **Split** or **Shape diamond**.

01

02

03

04

05

06

07

08

## Your photos and videos

- 6 Press **Save** followed by **Yes** to save the new merged video. Choose to save over the original file or as a new file.
- 7 Repeat these steps to merge more videos.

### Merging a photo with a video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
  - 2 Select  and choose **Image merge**.
  - 3 The **My stuff** folder will open select either **My Images** or **My memory card** (if fitted). Choose the photo you would like to merge into your video and touch **Select**.
  - 4 Touch and slide the photo to merge it to the end or the beginning of the video.
- 5 Touch **Effect** to choose how the photo and video merge together: **None, Pan zoom, Oval, Uncover, Blind, Checker board, Dissolve, Split** or **Shape diamon**.
  - 6 Press **Save** followed by **Yes**. Choose to save over the original file or as a new file.
  - 7 Repeat these steps to merge more photos.

## Adding text to a video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Text overlay**.
- 3 Enter your text using the keypad and select **Done**.
- 4 Touch  and mark when you'd like the text to appear using .
- 5 Touch the area of the screen you'd like the text to appear in.



- 6 Touch  to mark when you'd like the text to disappear.
- 7 Touch **Preview** to ensure you are happy with the text overlay.
- 8 Touch **Save** followed by **Yes**. Choose to save over the original file or as a new file.
- 9 Repeat these steps to add more text.

01

02

03

04

05

06

07

08

## Your photos and videos

### Overlaying a photo

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Image overlay**.
- 3 The **My stuff** folder will open select either **My images** or **My memory card** (if fitted). Choose the photo you would like to overlay your video and touch **Select**.
- 4 Touch  and mark when you'd like the photo to appear using .
- 5 Touch the area of the screen you'd like the photo to appear in. If the photo is too big it will overlay the whole screen, not just the area selected.

- 6 Touch  to mark when you'd like the photo to disappear.
- 7 Touch **Preview** to ensure you are happy with the photo overlay.
- 8 Touch **Save** followed by **Yes**. Choose to save over the original file or as a new file.
- 9 Repeat these steps to add more photos.

### Adding a voice recording

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Voice recording**.
- 3 The quality of the original audio will be affected by adding a voice recording. Touch **Yes** to continue.

- 4 Touch  to view your video. When you get to the part you'd like to record your voice over, press .



- 5 Press  or  to stop recording and playback.
- 6 Touch **Preview** to ensure you are happy with the voice recording.
- 7 Touch **Save** followed by **Yes** to save. Choose to save over the original file or as a new file.
- 8 Repeat these steps to add more voice recordings to the video.
- ### Adding a soundtrack to your video
- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Audio dubbing**.
- 3 The **My stuff** folder will open select either **My sounds** or **My memory card** (if fitted). Choose the track you would like to add to your video and touch **Select**.
- 4 The original audio of your video will be erased. Touch **Yes** to continue.
- 5 If the audio is shorter than the video choose whether to play **Once** or to **Repeat** it.
- 6 Choose to save over the original file or as a new file.

01

02

03

04

05

06

07

08

## Your photos and videos

### Changing the speed of your video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Time scaling**.
- 3 Select one of the four speed options: **x4, x2, x1/4, x1/2**.
- 4 Choose to save over the original file or as a new file.

**NOTE:** Only 3gp Video file can be edited.

## Multimedia

You can store any multimedia files into your phone's memory so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory.

To access the Multimedia menu, touch  then . Touch  to open a list of folders storing all of your multimedia files.

### Pictures

**My images** contains a list of pictures including default images pre-loaded onto your phone, images downloaded by you and images taken on your phone's camera.

Touch  to change the view from thumbnail view to list view.

### My images option menu

The options which are available to you in **My images** depend on what type of image you have selected. All of the options will be available for pictures you have taken on the phone's camera, but only the **Sort by, List View, Folder info.** and **Memory manager** options are available for default images.

01

02

03

04

05

06

07

08

## Multimedia

**Send** - Send the image to a friend.

**Move** - Move an image from the phone memory to a memory card or vice versa.

**Copy** - Copy an image from the phone memory to a memory card or vice versa.

**Delete** - Delete an image.

**Rename** - Rename an image.

**Print** - Print the selected image using a printer.

**Create new folder** - Create a new folder within the My images folder.

**Slide show** - Start a slide show.

**List/Grid view** - Grid view to List view or vice versa.

**Folder info.** - View the Name, Size, Date details of the folder and number of files and sub-folders inside the folder.

**Memory manager** - View the memory status.

**Delete all** - Delete all of your images.

### Sending a photo

- 1 Touch  then .
- 2 Touch  then choose **My images**.
- 3 Touch  **Send** and choose from **Message**, **Email** or **Bluetooth**.
- 4 If you choose **Message** or **Email**, your photo will be attached to a message and you can write and send the message as normal. If you choose **Bluetooth**, Bluetooth will be turn on automatically and your phone will search for a device to send the picture.

## Using an image

You can choose images to use as wallpapers and screensavers or even to identify a caller.

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Select an image and touch .
- 4 Touch **Use as** and choose from:

**Wallpaper** - Set a wallpaper for the standby screen.

**Contacts image** - Allocate an image to a particular person in your contacts list so that their picture shows when they call you.

**Start-up image** - Set an image to appear when you switch the phone on.

**Power off image** - Set an image to appear when you switch the phone off.

## Printing an image

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Select an image and touch .
- 4 Touch **Print** then choose between **Bluetooth** and **PictBridge**.

**TIP!** You can print via bluetooth or by connecting to a PictBridge compatible printer.

01

02

03

04

05

06

07

08

# Multimedia

## Moving or copying an image

You can move or copy an image between the phone memory and the memory card. You might want to do this to either free up some space in one of the memory banks or to safeguard your images from being lost.

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Touch  and select **Move** or **Copy**.
- 4 You can mark/unmark the images by tapping it sequentially. Mark the image that you want to move or copy and touch **Copy/Move**.

## Creating a slide show

If you want to look at all of the images on your phone, you can create a slide show to save you from having to open and close each individual image.

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Choose a start image for your slide show.
- 4 Touch  then **Slide show**.

## Sounds

The **My sounds** folder contains the Downloaded sounds, **Default sounds** and **Voice recordings**. From here you can manage, send or set sounds as ringtones.

## Using a sound

- 1 Touch  then .
- 2 Touch  then **My sounds**.
- 3 Select **Default sounds** or **Voice recordings**.
- 4 Select a sound and it will begin to play.
- 5 Touch  and select **Use as**.
- 6 Choose from **Ringtone**, **Message tone**, **Start-up** or **Shut down**.

## Videos

The **My videos** folder shows a list of downloaded videos and videos you have recorded on your phone.

### Watching a video

- 1 Touch  then .
- 2 Touch  then **My videos**.
- 3 Select a video to play.

## Using options while video is paused

Touch  while in pause mode and choose from:

**Capture** - Capture the frozen frame as a picture.

**Send** - Send the video in a message or via Bluetooth.

**Delete** - Delete the video.

**Edit** - Edit the video.

**File info.** - View the Title, size, date, type, duration, protect and forward.

01

02

03

04

05

06

07

08

## Multimedia

### Editing a video clip

While your video is being played and is in pause mode you can choose from a number of options to edit the video clip.

- 1 Select a video and touch **Play**.
- 2 Touch  then .
- 3 Touch **edit** and choose from:

**Trim** - Cut the video down to only the part you want.

**Video merge** - Merge the video with another video clip.

**Image merge** - Merge the video with an image from your Images folder.

**Text overlay** - Add text to the video.

**Image overlay** - Add an image to the video.

**Audio dubbing** - Choose to add sound from the **Defaults folder** or from your own **Voice recordings**.

### Sending a video clip

- 1 Select a video and touch .
- 2 Touch **Send** and choose from **Message, Email** or **Bluetooth**.
- 3 If you choose **Message** or **Email**, your video clip will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video.

## Using the video options menu

From the **My videos** folder, you can choose from the following options:

**Send** - Send a video to a friend.

**Move** - Move a video clip from the phone memory to a memory card or vice versa.

**Copy** - Copy a video clip from the phone memory to a memory card or vice versa.

**Delete** - Delete a video.

**Rename** - Rename a video.

**Create new folder** - Create a new folder within the **My videos** folder.

**Sort by** - Sort videos into order by Date, Type or Name.

**List/Grid view** - Grid view to List view or vice versa.

**Folder info** - View the Name, Size, Date details of the folder and number of files and sub-folders inside the folder.

**Memory manager** - View the memory status.

**Delete all** - Delete all videos.

## Games and Applications

You can install new games and applications to your phone to keep you amused when you have time to spare.

01

02

03

04

05

06

07

08

## Multimedia

### Installing a game/application via local install

- 1 Touch  then .
- 2 Touch  and **Others** or **My memory card** if external memory is inserted.
- 3 Select the file(\*.jad or \*.jar) to install and press **Install** command. An application will be installed.

**NOTE:** The jad should contain its own jar.

### Playing a game

- 1 Touch  then .
- 2 Touch  **My games & apps**.
- 3 Open the Games folder and choose and touch a game to launch.

### Using the games options menu

From the **Games** folder, the following options are available when you touch :

**Delete** – Delete a file.

**Create new folder** – Create a folder within **My games & Apps**.

**Rename** – Rename a file.

**Move** – Move a file from the phone memory to a memory card or vice versa.

**File info.** – View the Name, Size, Date, Time, Type, Duration, Dimension, Protection and Copyright details.

**Sort by** - Sort the games and applications by **Date, Size or Name**.

**Memory manager** - View the memory status.

**Delete all** - Delete all files.

## Documents

From the Documents menu, you can view all of your document files. From here you can view Excel, Powerpoint, Word, Text and PDF files.

## Transferring a file to your phone

Bluetooth is probably the easiest way to transfer a file from your computer to your phone. You can also use LG PC Suite via your sync cable, see page 102 for details.

To transfer using Bluetooth:

- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by touching **Yes**.
- 4 The file should appear in your **Documents** or **Others folder**.

## Viewing a file

- 1 Touch  then .
- 2 Touch  then **Documents**.
- 3 Select a document and touch **View**.

01

02

03

04

05

06

07

08

# Multimedia

## Others

The **Others** folder is used to store files which are not pictures, sounds, videos, games or applications. It is used in the same way as the **Documents** folder. You may find that when you transfer files from your computer to your phone that they appear in the **Others** folder rather than the **Documents** folder. If this happens you can move them.

To move a file from **Others** to **Documents**:

- 1 Touch  then .
- 2 Touch  then **Others**.
- 3 Select a file and touch .
- 4 Touch **Move**, choose the destination folder from the list by touching the arrow icon. The screen will display **Moved** when the transfer is complete.

## Creating a movie

- 1 Touch  then .
- 2 Touch  (Muvee studio).
- 3 Touch  to add an image. Checkbox images you want to include then select **Insert**.
- 4 Touch style tab to choose a Muvee style.
- 5 Touch **Default sound** to change the sound.
- 6 Touch  to see what you've created.
- 7 Touch  then **Order** to make an order.

- 8 Touch  then **Save Location** to choose where to save the movie.



## Music

Your LG KP500 has a built-in music player so you can play all your favourite tracks. To access the music player, touch  then  then . From here you can access a number of folders:

**Recently played** - View all of the songs you have played recently.

**All tracks** - Contains all of the songs you have on your phone.

**Artists** - Browse through your music collection by artist.

**Albums** - Browse through your music collection by album.

**Genres** - Browse through your music collection by genre.

**Playlists** - Contains all playlists you have created.

**Shuffle tracks** - Play your tracks in a random order.

01

02

03

04

05

06

07

08

## Multimedia

### Transferring music onto your phone

The easiest way to transfer music onto your phone is via Bluetooth or your sync cable.

You can also use LG PC Suite, see page 102 for details. To transfer using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are visible to one another.
- 2 Select the music file on the other device and choose to send it via Bluetooth.
- 3 When the file is ready to be sent you should accept it on your phone by touching **Yes**.
- 4 The file should appear in **Music > All tracks**.

### Playing a song

- 1 Touch  then .
- 2 Touch , then **All tracks**.
- 3 Select the song you want to play.
- 4 Touch  to pause the song.
- 5 Touch  to skip to the next song.
- 6 Touch  to skip to the previous song.
- 7 Touch  to return to the **Music** menu.



## Using options while playing music

Touch  and choose from:

**Minimise** - Make the music player screen disappear so that you can continue using your phone as normal.

**File info.** - View the Title, size, date, type, duration, protect and forward.

**Send** - Send the song as a message or via Bluetooth.

**Use as** - Use the song as Ringtone, Message tone, Start-up or Shut down.

## Creating a playlist

You can create your own playlists by choosing a selection of songs from the **All tracks** folder.

- 1 Touch  then .
- 2 Touch , then **Playlists**.
- 3 Touch **Add new playlist**, enter the playlist name and touch **Save**.
- 4 The **All tracks** folder will show all the songs in your phone. Touch all of the songs that you would like to include in your playlist; a tick will show next to the track names.
- 5 Touch **Save**.

01

02

03

04

05

06

07

08

# Multimedia

## Editing a playlist

From time to time, you may want to add new songs or delete songs from a playlist. When you want to do this, you can edit the playlist.

- 1 Touch  then .
- 2 Touch , then **Playlists**.
- 3 Select the playlist.
- 4 Touch  and select:

**Add new songs** – To add more songs to the playlist. Mark the ones you want and touch **Done**.

**Remove** – Remove a song from the playlist. Touch **Yes** to confirm.

**Memory status** - View the memory status.

**Remove all** - Remove all tracks from the playlist.

## Deleting a playlist

- 1 Touch  then **Entertainment**.
- 2 Touch **Music**, then **Playlists**.
- 3 Touch  then **Delete** or **Delete all** to delete all of the playlists.

## Using the radio

Your LG KP500 has an FM radio feature so you can tune into your favourite stations to listen to on the move.

**NOTE:** You will need to insert your headphones in order to listen to the radio. Insert them into the headphone socket (this is the same socket that you plug your charger into).

## Searching for stations

You can tune radio stations into your phone by searching for them either manually or automatically. They will then be saved to specific channel numbers so you don't have to keep re-tuning. You can save up to 50 channels in your phone. You must first attach the headset to the phone as this acts as the antenna.

### To auto tune:

- 1 Touch  then .
- 2 Touch  then .
- 3 Touch Auto scan. Then the stations will be automatically found and allocated to a channel in your phone.

**NOTE:** You can also manually tune into a station by using

 and  displayed next to the radio frequency. If you press and hold  and , the stations will be automatically found.

## Resetting channels

- 1 Touch  then .
- 2 Touch  then .
- 3 Choose **Reset** to reset the current channel or choose **Reset all** to reset all of the channels. Each channel will return to the starting 87.5Mhz frequency.

## Listening to the radio

- 1 Touch  then .
- 2 Touch  then touch the channel number of the station you would like to listen to.

**TIP!** To improve the radio reception, extend the headset cord, which functions as the radio antenna.

You can minimize the screen and listen the BGM Radio by tapping .

01

02

03

04

05

06

07

08

# Organiser

## Adding an event to your calendar

- 1 From the standby screen select , then touch  and choose . Select **Calendar**.
- 2 Select the date you would like to add an event to.
- 3 Touch  then **Add event**.
- 4 Touch **Category** then choose from **Appointment, Anniversary** or **Birthday**.  
Check the date and enter the time you would like your event to begin.
- 5 For appointments and anniversaries enter the time and date your event finishes in the lower two time and date boxes.

- 6 If you would like to add a subject or a note to your event, touch **Note** and type in your note, followed by **Save**.
- 7 Set **Alarm** and **Repeat**.
- 8 Select **Save** and your event will be saved in the calendar. A square cursor will mark the day that any events have been saved to and a bell will ring at the start time of your event, so that you can stay organised.

**TIP!** You can set a holiday in your calendar. Touch each day you are on holiday one at a time, then touch  and select **Set holiday**.

## Changing your default calendar view

- 1 From the standby screen select , then touch  and choose . Select **Settings**.
- 2 Touch **Calendar** and choose either **Monthly view** or **Week view**.
- 3 Set **week starts on**.
- 4 Touch **Save** to confirm your choice.

## Adding an item to your to do list

- 1 From the standby screen select , then touch  and choose .
- 2 Select **To do** and touch **Add To do**.
- 3 Set the date for the to do item, add notes and select a priority level: **High**, **Medium** or **Low**.
- 4 Save your to do list item by selecting **Save**.

**TIP!** You can edit a item by selecting it, and touch the tab and input. Confirm your amends by selecting **Save**.

01

02

03

04

05

06

07

08

# Organiser

## Sharing a to do item

- 1 From the standby screen select , then  and choose . Select **To do**.
- 2 Select the to do item you would like to share, then touch .
- 3 Select **Send**. You can choose to share your to do item by **Text message**, **Multimedia msg.**, **Email** or **Bluetooth**.

**TIP!** You can back up and synchronise your calendar with your computer. See PC Sync on page 102.

## Adding a memo

- 1 From the standby screen select , then touch  and choose . Select **Memo**.
- 2 Touch **Add memo**.
- 3 Type your memo, followed by **Save**.
- 4 Your memo will appear on screen next time you open the **Memo** application.

**TIP!** You can edit an existing memo. Select the one you want to edit and type your changes.

## Using date finder

Date finder is a handy tool to help you calculate what the date will be after a certain amount of days has passed. For example, 60 days from 10.10.07 will be 09.12.2007.

This is great for keeping tabs on deadlines.

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Date finder**.
- 3 In the **From** tab set your required date.
- 4 In the **After** tab set the number of days.
- 5 The **Target date** will be shown below.

## Setting your alarm

- 1 From the standby screen select , then touch  and choose .
- 2 Touch **Add alarm**.
- 3 Set the time you would like the alarm to sound and touch **Save**.
- 4 Choose whether you would like your alarm to repeat **Once, Daily, Mon - Fri, Mon - Sat, Sat - Sun, Except holiday or Choose weekday**.  
The icons indicate the weekday you select.
- 5 Select **Alarm type** to select a type for your alarm.
- 6 Touch **alarm tone** then choose **Default sounds** or **Voice recordings** folder to find sounds. To listen to sounds touch the sound, followed by .

01

02

03

04

05

06

07

08

## Organiser

- 7 Add a memo for the alarm. Touch **Save** when you have finished typing the memo.
- 8 Finally you can set the snooze interval at 5, 10, 20, 30 minutes, 1 hour or off.
- 9 Once you have set your alarm, touch **Save**.

**NOTE:** You can set up to 5 alarms.

**TIP!** Touch on/off icon on the right hand side of the alarm to set.

## Adding a memo with drawing panel

- 1 From the standby screen select , then touch  and choose .
- 2 Touch **Add drawing**.
- 3 Draw your memo on the touch screen LCD followed by .
- 4 Your memo will appear on screen next time you open the **Drawing Panel** application.

## Voice recorder

Use your voice recorder to record voice memos or other sounds.

- 1 Touch  then .
- 2 Touch  then  and **Settings** choose from:

**Duration** – Set the recording duration. Choose from **No limit**, **MMS msg. size** or **1 minute**.

**Quality** – Select the sound quality. Choose from Super Fine, Fine or Normal.

## Recording a sound or voice

- 1 Touch  then .
- 2 Touch .
- 3 Touch  to begin recording.
- 4 Touch  to end recording.
- 5 Touch  to listen to your recording.



## Sending the voice recording

- 1 Once you have finished recording, touch .
- 2 Touch **Send via** and choose from **Message, Email** or **Bluetooth**. If you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on.

**NOTE:** After you have finished recording, touch  and choose **Send via, File, Delete, Use as** (to use the recording as your ringtone) **Settings** or **Go to my sounds**.

01

02

03

04

05

06

07

08

# Organiser

## Using your calculator

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Calculator**.
- 3 Touch the numeric keys to input numbers.
- 4 For simple calculations, touch the function you require (+, -, \*, /), followed by =.
- 5 For more complex calculations, touch  and choose from **sin**, **cos**, **tan**, **log**, **ln**, **exp**, **sqrt**, **deg** or **rad** etc..

## Converting a unit

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Converter**.
- 3 Choose whether you would like to convert **Currency**, **Surface**, **Weight**, **Length**, **Temperature**, **Volume** or **Velocity**.
- 4 You can then select the unit, and enter the value you would like to convert from, followed by the unit you would like to convert to.
- 5 The corresponding value will appear on the screen.

## Using the stopwatch

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Stopwatch**.
- 3 Touch **Start** to begin the timer.
- 4 Touch **Lap** if you want to record a lap time.
- 5 Touch **Stop** to end the timer.
- 6 Touch **Resume** to restart the stopwatch at the time you stopped it at, or touch **Reset** to begin the time again.

## Adding a city to your world time

- 1 From the standby screen select , then touch  and choose .
- 2 Select **World time**.
- 3 Touch the , followed by **Add city**. Start typing the name of the city you require and it will show at the top of the screen.

01

02

03

04

05

06

07

08

## PC Sync

You can synchronise your PC with your phone to make sure all your important details and dates match, and also to backup your files to put your mind at ease.

### Installing LG PC Suite on your computer

- 1 From the standby screen press  and select  and choose .
- 2 Select **USB connection mode** and choose.  
**PC internet**  
**Mass storage**  
**PC suite**  
**Music sync**  
**Always ask**
- 3 Insert the supplied CD into your PC. Click on the **LG PC Suite Installer** which will appear on your screen.

- 4 Select the language you would like the installer to run in and click **OK**.
- 5 Follow the instructions on the screen to complete the LG PC Suite Installer wizard.
- 6 Once installation is complete, the LG PC Suite icon will appear on your desktop.

### Connecting your phone and PC

- 1 Connect the USB cable to your phone and your PC.
- 2 Double click on the **LG PC Suite** icon on your desktop.
- 3 Click on **Connection Wizard**, then **USB**.
- 4 Click on **Next**, then **Next** again, then **Finish**.  
Your phone and PC are now connected.

## Backing up and restoring your phone's information

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Backup** icon, and select **Backup** or **Restore**.
- 3 Mark the contents you would like to back up or restore. Select the location you would like to backup information to, or restore information from. Click **OK**.
- 4 Your information will be backed up or restored.

## Viewing your phone files on your PC

- 1 Connect your phone to your PC as outlined previously.
- 2 Click on the **Contents** icon.
- 3 All of the documents, flash contents, images, sounds and videos you have saved onto your phone will be displayed on the screen in the LG Phone folder.

**TIP!** Viewing the contents of your phone on your PC helps you to arrange files, organise documents and remove contents you no longer need.

01

02

03

04

05

06

07

08

## PC Sync

### Synchronising your contacts

- 1 Connect your phone to your PC.
- 2 Click on the **Contacts** icon.
- 3 Your PC will now import and display all contacts saved to your USIM card and handset.
- 4 Click on **File** and select **Save**. You can now select where you would like to save your contacts to.

**NOTE:** To backup contacts saved to your USIM card, click on the SIM card folder on the left side of your PC screen. Select **Edit** at the top of the screen, then **Select all**. Right-click your contacts and select **Copy to contact**. Now click on the **Handset** folder on the left of your screen and all your numbers will be displayed.

### Synchronising your messages

- 1 Connect your phone to your PC.
- 2 Click on the **Messages** icon.
- 3 All of your PC and phone messages will be displayed in folders on your screen.
- 4 Use the tool bar at the top of your screen to edit and rearrange messages.

## Using your phone as a mass storage device

Your phone can be used as a mass storage device.

- 1 Disconnect your phone from your PC.
- 2 From the standby screen select , then touch .
- 3 Select , then **USB connection mode**.
- 4 Touch **Mass storage**.
- 5 Connect your phone to your PC. Your phone will read: **Connected**.
- 6 All of your phone files will automatically be stored onto your PC hard drive.

**NOTE:** Your phone must be unplugged from your PC to initiate Mass Storage.

## Using your phone as Music Sync device

Your Phone can be used as Music Sync device to Sync Music Files only.

Music Sync can be done using Windows Media Player 10 / 11 and supports both Handset Memory and External Memory Card.

- 1 Disconnect your phone from your PC.
- 2 From the standby screen select , then touch .
- 3 Select , and then **USB connection mode**.
- 4 Touch **Music sync**.
- 5 Connect your phone to your PC. Your phone will read: **Connecting as Music Sync ...** followed by **Disconnect Cable to Stop Music Sync**.

01

02

03

04

05

06

07

08

# The web

## Browser

**Browser** gives you a fast, full colour world of games, music, news, sport, entertainment and loads more, straight to your mobile phone. Wherever you are and whatever you're into.

## Accessing the web

- 1 From the standby screen select , then touch  and choose .
- 2 To access the browser homepage directly, select **Home**. Alternately select **Enter address** and type in your desired URL, followed by **Connect**.

**NOTE:** An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

## Adding and accessing your bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Bookmarks**. A list of your Bookmarks will appear on the screen.
- 3 To add a new bookmark, select  and touch **Add Bookmark** or tap on "add bookmark" option. Enter a name for your bookmark followed by the URL.
- 4 Touch **Save**. Your Bookmark will now appear in the list of bookmarks.
- 5 To access the bookmark simply touch the bookmark and then touch Connect. You will be connected to your bookmark.

## Using RSS reader

RSS (Really Simple Syndication) is a family of web feed formats used to publish frequently updated content such as blog entries, news headlines or podcasts. An RSS document, which is called a feed, web feed, or channel, contains either a summary of content from an associated web site or the full text. RSS makes it possible for people to keep up with their favourite web sites in an automated manner that is easier than checking them manually. The user subscribes to a feed by entering the feed's link into the reader or by clicking an RSS icon in a browser that initiates the subscription process. The reader checks the user's subscribed feeds regularly for new content, downloading any updates that it finds.

## Saving a page

- 1 Access your required webpage as described above.
- 2 Touch  and select **Save this page**.
- 3 Enter a name for the webpage so you can easily recognise it.
- 4 Touch **Save**.

**TIP!** This menu will also allow you to edit titles of saved pages, protect or unprotect the screen memo, and delete saved pages.

01

02

03

04

05

06

07

08

## The web

### Accessing a saved page

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Saved pages**.
- 3 Select the required page and it will open.

### Viewing your browser history

- 1 From the standby screen select , then touch  and choose .
- 2 A list of web page titles you have accessed recently will be displayed. To access one of these pages, simply select the required page.

### Changing the web browser settings

- 1 From the standby screen select , then touch  and choose .
- 2 You can choose to edit **Profiles, Appearance settings, Cache, Cookies, Security**, or to reset all settings, select **Reset Settings**.

## Using your phone as a modem

Your KP500 can double as a modem for your PC, giving you email and internet access even when you can't connect using wires. You can use either the USB cable or Bluetooth.

### Using the USB cable:

- 1 Ensure you have the LG PC Suite installed on your PC.
- 2 Connect your KP500 and your PC using the USB cable and launch the LG PC Suite software.
- 3 Click **Internet Kit** on your PC. Then click **New** button and select **Modem**.
- 4 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on screen.

5 Write the Profile that can connect to the Internet and save the values.

6 The profile that you create will appear on your PC screen. Select it and click **Connect**. Your PC will connect through your KP500.

**NOTE:** For more information on synchronising using the LG PC Suite see page 103.

### Using Bluetooth:

- 1 Ensure Bluetooth is switched **On** and **Visible** for both your PC and KP500.
- 2 Pair your PC and KP500 so that a passcode is required for connection.
- 3 Use the **Connection wizard** on your LG PC Suite to create an active Bluetooth connection.
- 4 Click **Internet Kit** on your PC. Then click **New** button.

01

02

03

04

05

06

07

08

## The web

- 5 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on screen.
- 6 Write the Profile that can connect to the Internet and save the values.
- 7 The profile that you create will appear on your PC screen. Select it and click **Connect**.  
Your PC will connect through your KP500.

**NOTE:** For more information on Bluetooth see page 116.

# Settings

Within this folder you can adapt your settings to make your KP500 personal to you.

**NOTE:** For information on call settings see page 28.

## Personalising your profiles

You can quickly change your profile on the standby screen. Simply touch the status summary bar on the top and touch the profile tab.

Using the settings menu you can personalise each profile setting.

- 1 Press  and then choose .
- 2 Touch **Profiles** and then choose the profile you want to edit.
- 3 You can then change all of the sounds and alert options available in the list, including your **Voice Ring tone** and **Volume, Message alerts** settings and more.

## Changing your screen settings

- 1 Touch  then choose .
- 2 Touch  and then choose from:

**Wallpaper** - Choose the theme for your standby screen.

**Top Menu** - Choose the style of the top menu.

**Dialling** - Adjust the number size and colour.

**Font** - Adjust the font size.

**Backlight** - Choose how long the backlight remains ON.

**NOTE:** The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.

01

02

03

04

05

06

07

08

# Settings

**Brightness** - Adjust the screen brightness.

**Greeting message** - Choose on or off and fill in the greeting message.

**Start-up/Shut down** - Choose the theme for your start-up/shut down screen.

- 2 Touch **Save** to save your settings.

## Changing your phone settings

Enjoy the freedom of adapting how your KP500 works to your own style.

**TIP!** To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then choose .
- 2 Touch  then choose from the list below.

**Date and time** - Adjust your date and time settings or choose to auto update the time when you travel or for daylight saving.

**Power save** - Choose to switch the factory set power saving settings **Off, Night only** and **Always on**.

**Languages** - Change the language of your KP500's display.

**Auto key lock** - Lock the keypad automatically in standby screen.

**Security** - Adjust your security settings, including PIN codes and handset lock.

**Memory manager** - See **Using memory manager** on page 115 for more information.

**Reset settings** - Reset all the settings to their factory definitions.

**Handset information** - View the technical information for your KP500.

## Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone. If you want to change any settings, use this menu.

Touch  then .

Select .

## Network settings

**Select Network** - If you set to **Automatic**, KP500 automatically searches for the network and registers the handset to the network. This is recommended for best service and quality.

If you set to **Manual** all the currently available networks are shown and you can select one of them for registration. If the registration of the network has failed, the network lists are listed again and you can select any other one for registration.

**NOTE:** When your handset loses the network in manual mode, the popup message to select the available network will be shown on the Idle screen.

01

02

03

04

05

06

07

08

## Settings

**Preferred lists** - If the network is searching automatically, you can add a preferred network to be connected to. The following options are available.

**Internet profiles** - This menu shows the Internet profiles. You can create new profiles, delete or edit them by using the Option Menu. However, you cannot delete or edit default configurations depending on country variant.

**Access points** - Your network operator has already saved this information. You can add new access points using this menu.

**Packet data conn.** - Choose when your device should be connected to network for packet data.

**USB connection mode** - Choose Data service and synchronise your KP500 using the LG PC Suite software to copy files from your phone. See page 102 for more information on synchronisation. If you use Music sync with Windows Media Player, select Music sync in this menu. Music sync is only available for music content.

**Streaming settings** - Your network operator has already saved this information. You may edit it if you'd like to make changes.

## Using memory manager

Your KP500 has three memories available: the phone, the SIM Card and an external memory card (you may need to purchase the memory card separately).

You can use memory manager to determine how each memory is used and see how much space is available.

Touch  followed by . Select  then **Memory Manager**.

**Handset common memory** - View the memory available on your KP500 for Pictures, Sounds, Video, Flash, MMS, Email, Java applications and others.

**Handset reserved memory** - View the memory available on your handset for SMS, Contacts, Calendar, To do list, Memo, Alarm, Call history, Bookmarks and Miscellaneous items.

**SIM memory** - View the memory available on your SIM Card.

**External memory** - View the memory available on your external memory card (you may need to purchase the memory card separately).

**Primary storage settings** - Choose the location you prefer items to be saved to.

**TIP!** See page 14 for information on **Inserting a memory card**.

01

02

03

04

05

06

07

08

## Settings

### Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls.

#### To send a file:

- 1 Open the file you want to send, typically this will be a photo, video or music file.
- 2 Choose **Send**.  
Choose **Bluetooth**.
- 3 If you have already paired the Bluetooth device, your KP500 will not automatically search for other Bluetooth devices. If not, your KP500 will search for other Bluetooth enabled devices within range.
- 4 Choose the device you want to send the file to and touch **Select**.

- 5 Your file will be sent.

**TIP!** Keep an eye on the progress bar to make sure your file is sent.

#### To receive a file:

- 1 To receive files your Bluetooth must be both **On** and **Visible**. See Changing your Bluetooth settings on the right for more information.
- 2 A message will prompt you to accept the file from the sender. Touch **Yes** to receive the file.
- 3 You will see where the file has been saved and you can choose to **View** the file or **Use as wallpaper**. Files will usually be saved to the appropriate folder in your Media Album.

## Changing your blueooth settings:

- 1 Touch  and choose .
- 2 Choose  then touch  and choose **Settings**.

Make your changes to:

**My device visibility** - Choose to be **Visible** or **Hidden** or **Visible for 1 min**.

**My device name** - Enter a name for your KP500.

**Supported services** - Choose how to use Bluetooth in association with different services. See **Using your phone as a modem** on page 109 or **Using a Bluetooth headset** on page 118.

**Remote SIM Mode** - Turn on or off.

**My address** - Show your Bluetooth address.

## Pairing with another Bluetooth device

By pairing your KP500 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Settings** menu.
- 2 Touch **Search**.
- 3 Your KP500 will search for devices. When the search is completed **Refresh** will appear on screen.
- 4 Choose the device you want to pair with and enter the passcode, then touch **OK**.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode protected Bluetooth connection is now ready.

01

02

03

04

05

06

07

08

# Settings

## Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to place your headset in pairing mode and pair your devices.
- 3 Touch **Ask before connect** or **Always connect** and touch **Yes** to Connect now. Your KP500 will automatically switch to Headset profile.

**TIP!** See page 29 for details on **BT answer mode** so that you can control how you answer calls when your Bluetooth headset is connected.

## Accessories

These accessories are supplied with KP500.

### Charger



### Battery



### Stereo headset



### Data cable and CD

Connect and synchronise your KP500 and PC.



### User Guide

Learn more about your KP500.



### NOTE:

- Always use genuine LG accessories.
- Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with our regional service company or agent for further inquiries.

### Protection Film

#### **WARNING:**

When the protection film is attached on touch window, touch sensitivity might be decreased.



01

02

03

04

05

06

07

08

## Network service

The wireless phone described in this guide is approved for use on the GSM 900, DCS 1800, GSM 850 and, PCS 1900 network.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

## Technical data

### General

Product name : KP500

System : GSM 900 / DCS 1800 / GSM 850 / PCS 1900

### Ambient Temperatures

Max : +55°C (discharging),  
+45°C (charging)

Min : -10°C

# Declaration of Conformity



## Suppliers Details

Name

LG Electronics Inc

Address

LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

## Product Details

Product Name

E-GSM 900 / DCS 1800 / GSM 850 / PCS 1900 Quad Band Terminal Equipment

Model Name

KP500, KP500Q, KP570, KP570Q

Trade Name

LG

# CE 0168

## Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.6.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v.1.2.1  
EN 60950-1 : 2001  
EN 50360/EN 50361 : 2001  
EN 301 511 V9.0.2  
EN 300 328 V 1.7.1

## Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom  
Notified Body Identification Number : 0168

## Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center  
LG Electronics Logistics and Services B.V.  
Veluwezoom 15, 1327 AE Almere, The Netherlands  
Tel : +31 - 36 - 547 - 8940, Fax : +31 - 36 - 547 - 8794  
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

1, September, 2008

  
Signature of representative

## Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

### Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information  
This mobile phone model KP500 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.

- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.407 W/kg (10g) and when worn on the body is 0.940 W/Kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

## Product care and maintenance

### **WARNING**

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.

## Guidelines for safe and efficient use

- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

### Efficient phone operation

#### Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

### Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.

- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music while out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

## **Avoid damage to your hearing**

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

## **Glass Parts**

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

# Guidelines for safe and efficient use

## Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

## Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

## In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

## Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

## Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

## Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.

- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.

## Trouble Shooting

This chapter lists some problems that you might encounter while using your phone. Some problems require that you call your service provider, but most of problems you encounter are easy to correct yourself.

Message	Possible causes	Possible Corrective measures
SIM error	There is no SIM card in the phone or you may have inserted it incorrectly.	Make sure that the SIM card is correctly inserted.
No connection to the network	Signal weak Outside GSM network	Move higher to a window or open space. Check service provider coverage map.
Codes do not match	When you want to change a security code you have to confirm the new code by entering it again. The two codes that you have entered do not match.	Contact your Service Provider.
Function cannot be set	Not supported by Service Provider or registration required	Contact your Service Provider.
Calls not available	Dialling error New SIM card inserted Charge limit reached	New network not authorised. Check for new restrictions. Contact Service Provider or reset limit with PIN 2.
Phone cannot be switched on	On/Off key pressed too briefly Battery empty Battery contacts dirty	Press On/Off key for at least two seconds. Charge battery. Check charging indicator in the display. Clean contacts.

<b>Message</b>	<b>Possible causes</b>	<b>Possible Corrective measures</b>
Charging error	Battery totally empty	Charge battery.
	Temperature out of range	Make sure the ambient temperature is right, wait for a while, and then charge again.
	Contact problem	Check power supply and connection to the phone. Check the battery contacts, clean them if necessary.
	No mains voltage	Plug in to a different socket or check voltage.
	Charger defective	If the charger does not warm up, replace it.
	Wrong charger	Only use original LG accessories.
	Battery defective	Replace battery.
Phone loses network	Signal too weak	Reconnection to another service provider is automatic.
Number not permitted	The Fixed dial number function is on.	Check settings.

## WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

### Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software updgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

### Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

CITY NAME	CONTACT NO
Ahmedabad	079-26461603
Bangalore	080-39889999
Bhopal	0755-2768650
Bhubaneswar	0674-2455999
Calcutta	033-22272505
Chandigarh	0172-39010909
Chennai	044-28220370
Coimbatore	0422-2238602
Delhi + NCR	011-26145000/39889999
Hyderabad	040-23231448
Jaipur	0141-2365264
Lucknow	0522-2635535
Mumbai + Thane	022-24930044/39889999
Patna	0612-2221694
Pune	020-56031555

**ALL INDIA BSNL/MTNL SUBSCRIBERS CALL:**  
**1901 180 9999**

## BRANCH ADDRESSES

Sl. No.	Branch	Branch Office Address	STD Code	Landlines No.	Reliance No.
1.	Ahmedabad	LGEB, 232-234, Pithampur, Jagan Plaza, Bhargava Road, Botoladiv Road, Ahmedabad - 51	079	2662704, 2672533/34	33026471
2.	Aggra	LGEB, 12, Khandelwal Hind Santhosh, Khajuradi Crossing, Aggra	0562	293911, 293917	33026471
3.	Ajmer	LGEB, Block-E, 6th Floor, P.C. Chatterjee Market, Bambanohra Tal, GTR (E) Asanod-713363	0541	959636	330628130210
4.	Aurangabad	LGEB, 301, CIDCO No.3, Opp.1st Road Rampur, Jilsha Road, Aurangabad- 431002	0240	2344705	
5.	Aurangabad	LGEB, 409, Sagar Singh, Mughla Road, Stateement of Gandhiji Bank, Amravati, Aurangabad	0210	5448801	
6.	Bhatinda	LGEB, 17 P O Ganar Sanawala, 12 Km Milestone, Village Malha Link Road Bhatinda-151001	0164	242446, 242993	3306274/75
7.	Bangalore	LGEB, 103, TK Marston, Ground Fl., KH Road, Bangalore- 560027	080	5116145	3306273/34
8.	Bhopal	13 A, Vardaan International Corporation, Sector-3, Government Industrial Area J K Road Bhopal	0753	5263861, 5263871	330628130610
9.	Bhubaneswar	LGEB, Plot No.02, 1st Fl., Bapuji Nagar, Bhubaneswar- 751009	0674	251450, 251428	330625130625
10.	Calcutta	LGEB, 130, Chu-Min-Saras, 6th Floor, Metro Towers, Calcutta-700011	033	2388259/31	3306275
11.	Chandigarh	LGEB, Plot No.177-6, Ind. Area, Phase-1, Chandigarh	0172	588358/89	
12.	Chennai	LGEB, 641, 1,2nd Avenue, Panna Tower, Anna Nagar West, Chennai-600040	984	5335266-18	3306276/79
13.	Cochin	LGEB, 403/120, Vasudeva Buildings, T.D Road, Emakulam Cochin-682011	0484	246866, 247044	3306277/78
14.	Coimbatore	LGEB, 2502, Sangarur Main Road, Kannappa Nagar, Coimbatore-641027	0422	232226, 2321862	3306113306273
15.	COSE DEL	LGEB, 221, Chakri Industrial area, Phase 2, New Delhi	011		33062513306270/6
16.	DEWA DCW	LGEB, 138, MVS ONE, BOHAR ROAD, Opp. Mahipala Agrum Hospital, Pungabi Bagh, New Delhi- 110006	011		3306270, 33062511
17.	Dehradun	LGEB, M. 22, Mohanwala, Tata Commercial Compound, Dehradun Sahawanganj Road, Dehradun	0135	264211, 264263	3306111/12
18.	Goa	LGEB, Plot No. 03 - 38-D-4, Nagoj Road, 8th, Sankar, Bambolim, Goa-403	0832		33062513062514
19.	Gurgaon	LGEB, B-14 F-1 Block, Centre Point Bldg, Sector-14, Gurgaon.	0124	0474001, 621-63	3306251306288
20.	Ghaziabad	LGEB, J-10, HCC, Rajapur Ghaziabad	0120	2722873, 272468	3306281306287
21.	Gwalior	LGEB, Shimshirni Bhawan, C-4, Aggarwal Park, Chaurkhuri, Gwalior-781003	0561	26894, 26259, 26265, 26290, 26292	3306276
22.	Hyderabad	LGEB, KV 1/1, ECH, Uppala Hyderabad-500139	989	2322244, 25178	3306276
23.	Jaipur	LGEB, 603/17, Bari Nagar Road, Behind Renuka Petrol Pump, Gokal Road, Mulla- 302030	0888	2327251/52/53	3306281306261
24.	Jalandhar	LGEB, Jalandhar, DDA Bara Trade Centre, S1/5 M.G. Road, Jalandhar-151003	01731	548023/24, 244688, 2504969	3306281306260
25.	Jammu	LGEB, B-1, Sankar Marg, Lal Kothi Scheme, Jammu-180015	0191	274153, 274249	3306276, 3306278
26.	Jalandhar	LGEB, Opp. Jassi Market Village Khajura, Near TVS Godown, C/ Road, Jalandhar	01824	50381/68	
27.	Jammu	LGEB, Plot No. 52, Transport Nagar, Jammu	0191	2472119, 2474236, 2474384	3306281306260
28.	Jalandhar	211-14, BHO Bhawan Industrial area, Jalandhar - 141003	0191	274243, 274248	3306281306260
29.	Kanpur	LGEB, Sunshine Enterprises, Sunder Cold Storage, G/ Kamal Road, Kundli-208017	0130	2197001-1/2	3306273, 3306261
30.	Kozhikode	LGEB, 117/43A, Ernakulam Bldg, Cheruvy Road, Kozhikode-672001 Kerala.	0495	2868751/52, 2868753	3306273/68
31.	Lucknow	LGEB, 232, Jang Road, Khatia Nagar, Singpur Road Lucknow	0522	675338, 675338/8	3306273/68/89
32.	Ludhiana	LGEB, Village, Hande, Near Badwal Railway Station, Opp. Sengpur Road Ludhiana.	0161	268412-5	3306281
33.	Madurai	LGEB, 71-5-4, Jothimal Godown, Madurai Dindigul Highway, Parani, Madurai-625402 Tamilnadu	0452	244616	
34.	Mumbai (N & S)	LGEB, 10th No.10, 1st Fl., 1st corner behind R.K. Bank, Opp. 1st Water Tank, Kurla Industrial, Mumbai-400127	022	2621254-5/6	3302138, 3302139
35.	Nagpur	LGEB, SA Road No.13, Behind Moti Workshop, HEMC, Nigra Nagar-440016	07104	2051120, 2051122, 6p 234001	3306274/42
36.	Patna	LGEB, Samita Sadan, Ind. Fl. West Boring Road Crossing Patna-800001	0612		3306274, 3306278
37.	Pune	LGEB, 105/106, Premium Road, B-17, Shivajinagar, Pune-411005	020	5603704, 5603702/3/3/34	3306290, 3306296
38.	Pune Plant	LGEB, Plot A-5, HEMC, Sarjan-Gan, Tahsildar Shirur Chitli, Pune	02118	232389/68/8	
39.	Rajpur	LGEB, Nandan Compound, Shivam Nagar, Katora Talab, Rajpur (C.G.)	0771	602478, 603317/1	3306278
40.	Ranchi	LGEB, 401, Commerce Tower, Opp. Ugg. Club, Church Complex, Main Road, Ranchi	0661	2321518, 2321815	3306278
41.	Rajahmundry	LGEB, 301, 302, Charamma, D, Nagar Road, Rajahmundry-500003	0883	248169, 248162	3306251306268
42.	Surat	LGEB, 1000-1001, Uday Acon Plaza, Ind. Fl., Anand Mahal Road, Behind Bhakha Bhawan School, Adajan, Surat-395009	079	273960-85	3306279
43.	Thane	LGEB, A-61-13, Lakshmi Commercial Complex, Opp. Durgesh Park, Vija-2ndh, Thane-Bhamburda Highway, Dis. Thane-421002	02232	274401, 273709	3306281
44.	Tiruppur	LGEB, 19, 3/134, Behind New Handa Showroom, Aranganthi Road, Tiruppur-517501	0817	282370/68	
45.	Trichy	LGEB, 5/2, Kurnaman Plaza, Kurnaman Nagar, Vayalur Main Road, Trichy-17	0431	207110, 401-50	3306281
46.	Udaipur	LGEB, 101, Most Marg, Scheme, Udaipur	0294		3306281, 3306284
47.	Vasanthi	LGEB, 3, Street, Ganga Commercial Compound, Laganahar Road, Srirangapat, Mandavalli, Vasanthi	0542	237189	3302173/14, 3306280/01
48.	Vijayawada	LGEB, 1st Floor, Talambandi Complex, Ring Road, Near Executive Club, Vijayawada-520006.	0866	245128	3306251306258

Dealer name with stamp ..... Dealer address .....

IMEI No. .... Date of sale ..... Serial no. ....

 LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

## SERVICE CENTER LIST

LG CUSTOMER SERVICE

\*From: BSNL / MTNL

\*\*From Mobile:

Add local STD Code

1860-180-9999\*

39-01-0909\*\*

P/N: MCDE0003801

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490,Arts & Science College Road,Near Devi Nursing home,Adhoni-518301	9346490905	Mr.Mohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A,Near Nethaji Chouk,Cinema Road,Adilabad-504001	9346358181	Mr.Kiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp. S.K.B.R Collage: AMILAPURAM-533201	9346398638	Mr.Ravi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular/Pallavi Towers,Opp to Canara Bank,Subash Road, Ananthpur-515001	241450	Mr. Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no.2, mahalakshmi road, Armoor - 503224	9392622038	Mr.Srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla 522101	9346206305	Mr.B Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	J.P. Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.178/18 Baranam Plaza,Munthavari Center,Chirala-523155	328000	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp Bishnu Bhawan Hotel, Chittoor 517001	222733	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah 516001	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddhanta Communications	Opp to Sathya Lodge,NPR Circle,Dharmavaram 515671	9347064101	Mr.Shiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	Door.No:238-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet. Eluru-534002	329294	Mr.Diwaker
Andhra Pradesh	Gudivada	Kanakadurga-communications	Opp. Alankar Family Restaurant,Eluru Road,Nehru Chowk Center Gudivada 521301	9394220688	Mr.Kumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building,Kumman Veedhi Gudur - 524101,Nellore (Dt).	645644	Mr.Suman
Andhra Pradesh	Guntur	Vasavi Associates	Door No 6-7-36,V.S.N Complex,8th Line,Arundelpet,Guntur-522 002.	3257789	Mr.Satyam
Andhra Pradesh	Hazumagar/ Kodad	Sri Pawan Electronics	Malika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr. Narasimha Rao
Andhra Pradesh	Hindupuram	SVA Cellular	Shop.no.3,Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B Ravindra Nath
Andhra Pradesh	Huzarabad	Bhargavi Communications	Shp.No E-2, DCMs Complex Near Bus Stand,Main Road,Huzarabad-505122	9391755619	Mr.T.Vishnu Vardhan

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Andhra Pradesh	Hyderabad	Bhaya Communications	Shop no.109, Upper Ground Floor#12-2-925, S.G.M. Mall, Mehidpatnam, Hyderabad-500028	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No 8, Veniyya Vihar, Nalanda Building, Diluikh Nagar Main Road, Hyderabad- 500060	66109904	Mr.A Venket nariyan reddy
Andhra Pradesh	Hyderabad	Primus Informatic & Software Pvt Ltd	#18/A, Methodist Complex, 5-9-190, Lane Opp to Chemas, Abids, Hyderabad 500001	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-8-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9348320705	Mr.Sandeep Sori
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038	9346448323	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Ansysa Complex, Opp. Huda Complex, Tamaka, Hyderabad 500017	32968162	Mr. Sandeep Hesta
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel,Near Paradise circle,Sarjini Devi Road, Secunderabad - 500003	27721076 / 29277548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS,SHOP NO. 4,RELIANCE WEB WORLD BUILDING, Balaji Nagar Kukatpally 500072	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave,Street no 08,Syamal Buildings, Begumpet , Hyderabad 500016	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Vanu Electronics	D.No: 5-9-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32909099 / 55781999	Mr.Alokh Mohan
Andhra Pradesh	Hyderabad	Surbeam Technologies	120,Chenoy Trade Centre, Parklane, Near Paradise,Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor,Vishwa Central,Nuzmia Observatory Road,Ameerpet Hyderabad 500036	40033769 / 70	Mr.Tarun Dandavate
Andhra Pradesh	Jagjyal	SS Communications	Opp Kanti Bhavan Lane,Dawarka Nagar, Jagtjal 505327	9391533535	Mr.Hari
Andhra Pradesh	Jangoan	Sky Win Communications	#2-7-134, Beside Bharat Gas, Bus stand Road, Jangoan-506167.	9390102839	Mr. Varun
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangallama Temple, Opp. Andhra Bank, Jangareddygudem 534447	227297	Mr. Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No: 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5935533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397966633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar 506001	9391552223	Mr.Cheekrathar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. G. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37,Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyya Road, Khammam-507002	9396698866	Mr.Bhaskar Reddy
Andhra Pradesh	Kothagudam	S.Swathi CDMA Service Center	9-3-3,Above Sindhura Electronics,Near RTC BUS Stand,Kothagudem-507101	9391552228	Mr.Niaz Ahmed

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204.PALACE ROAD,KUPPAM-517425	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no.26,27, First floor, UCON Plaza, Kurnool-518001	220201	Mr.G Rama Krishna
Andhra Pradesh	Machilipatnam	Om See Sai Communications	25/276, Kota Vairi Tulla Center, Jagannadapuram, Machilipatnam 521001	9347741777	Mr.Ralee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No.2,1st floor,Sri sai Complex,CTM Road, Madanapally - 517325	9390025204	Mr.Manohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15,Shareef Complex,Near Bus stand, Mahbubnagar - 509002	9386348999	Mr.Anil
Andhra Pradesh	Mancheril	SS CDMA Service Centre	Shop no.7,Mounika Complex,BPL Chourasta,Mancherial-504208	9394552223	Mr.Rajesh
Andhra Pradesh	Medak	Balaji Communications	Door.no:1-3-77/,Opp to State bank of Hyderabad,Main Branch,Main road, Medak 501102	9346439961	Mr.Sudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot,Medchal - 501 401	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No.5,Srinivasa complex,Opp to market office,HYD road, Nalgonda -508001	9386102202	Mr Venkateshwar Rao
Andhra Pradesh	Nandyal	Dhanush Systems	Door:25/165 B.Sanjeev Nagar,Near Ramalayam, Nandyal 518501	9392736699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet,Near S.B.I ATM Narasaraopet 522601	224136	Mr.Sasi Bhushan
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249,Trunk Road,Nellore-524001	2339999	Mr.Rajesh
Andhra Pradesh	Nellore	Trinulaa Electronics	Shop No. 26, 1St Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T. Road, Nellore 524001	3290339	Mr.Pratap
Andhra Pradesh	Nirmal	Om Sai Electronics	Shop.no:1,Kala Nagar road, Beside 2 town Police station, Nirmal - 504106	9390000024	Mr.Mahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65,Shop no 1, 1 st Floor,H.M.H.V Complex,Beside Bus Stand,Nizamabad-503001	226000	Mr.Venu gopal
Andhra Pradesh	Ongole	Tejasi Communications	37-1-107,Opp: Kerala Bakery, Near Mastan Darga Center,Trunk Road, Ongole 523001	9393026115	Mr.Sasi Bhusan
Andhra Pradesh	Peddapalli (Ramsgundam)	Abhi Marketers	Shop No.15/6/291, MRK Plaza, Lakshmi Nagar, Godhavan Khani - 505209	9395987773	Mr.Nagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6553533	Mr.Siva Kumar
Andhra Pradesh	Produtur	SV Technologies	4-625-3,Gandhi Road,Opp Karur Vysya Bank,Produtur 516360	9347251806	Mr.Ravi Kumar
Andhra Pradesh	Rajamundry	Sri Infotech	Police Welfare Complex, City Hospitals Junction, Danvai Pet Main Road, Rajahmundry 533103		Mr.Raghendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Sreedee complex,bustand road,Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10,14,125 (JP Staires) Municipal Office Road, Raipet, Repalle-522285	9396227993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Sriimaan Complex,Beside Inspection Bungalow, Main Road, Sangareddy, 502001, Medak Dist 502001	9391216573	Mr.Ajaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange,Sattenapalli 522403	9397610550	Mr.Sai

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Andhra Pradesh	Shad Nagar	Sri Gana Electronics	Shop No : 2, Khajia Veeresam Complex, College Road, Shadnagar - 508216	9396331111	Mr.Vigneswar
Andhra Pradesh	Siddipet	Gopala Krishna Communications	SHOP No:13, FIRST FLOOR, MACCA COMPLEX,OPP.CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103 (A.P.)	9392511064	Mr. Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex,Opp Electrical Office,Ground Floor,Shop No.10 &11,GT Road,Srikakulam	324577	Mr.Kiran Kumar
Andhra Pradesh	Srikalahasti	KSV Computer Services	NWR Buildings,d.no-16-582, Panagal road,Srikalahasti 517644	939044399	Mr.Sahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street,Opp. Reliance Office,Sullurpet 524121	9346920527	Mr. S. Venkata Krishna
Andhra Pradesh	Tadepalligudem	Sri Haripriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem 534101	9346445720, 08818-210565	Mr. Suresh
Andhra Pradesh	Tanuku	Shivansand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku 534211	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/1/114, Opp. Kanikacharla Kalyanamsandagam, Bose Road, Tenali.	9347851330	Mr.Murali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3,TUDA OFFICE Road, Tirupathi-517501	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K I Computer House	39-9-46, Svs Temple Street, Labbijpet, Vijayawada 520010	6520461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32,Opp.Swarugha Foods,Vijay Talkies Center, Vijayawada 500002	320886-320888	Mr.Rahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7,Sapthagiri Plaza,Old Resuvanipallem, Vishakapatnam-530040	6634666	Mr.P.Venkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	65,Ground Floor,Backside of Sangam-Sarat Theatre,1st Lane,Dwarka Nagar,Vishakapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp. Z.P Office, Railway Station Road, Vizayanagaram 535001	9346416791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru 521165	9390303355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy - 509103, Dist Mahabubnagar	9398900275	Mr. Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1,Sai Bhawan, Sridevi Theatre Road, Hanamkonda Warangal-506001	2552223	Mr.L.Srinivas Rao
Andhra Pradesh	Zaheerabad	Remuka Technologies	Shop no:123/1,First Floor,Alipur,Zaheerabad.Pin-502220	316143	Mr.Abhiram Jushi
Assam	Guwahati	PRAGATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harisabha, Parbatara, Guwahati, Assam	2733501	Mr. Pradeep Khaitan
Assam	Silchar	IT ONLINE	N.S.Avenue, Ranginkharia,Silchar,Cachar,Assam	221260	Mr.Shama
Bihar	Araah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Araah 802301	9334538945	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eastwari Complex,Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334941700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printnrix Infosolutions	Gangati Complex,1st floor,Patel babu road 812001	9934605864	Mr.Himansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION,Super Market Complex,Patel Babu Road, BHAGALPUR-812002	9334255275	Mr.Kundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st Floor, Shop.No.5, MG Road, Bhaoraapur,Bihar Sharif, Nalanda Dist. Bihar.803101	9330408037	Mr.Amit Kanchan
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market,Chapra,Dist. Saran-941413 Bihar. 841413	9334285605	Mr.Jayant Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga 846004	9334934065	Mr.Abhinav Kumar Verma
Bihar	Gaya	Lovits Enterprises	Opp.Avinia Life Insurance, Kanya High School Road,Ramna,Gaya.	9334920333	Mr.Pankaj Panjan
Bihar	Muzaffarpur	Krish Enterprises	Nr.Karthoulinaka no 2,Kachisara Road,Muzaffarpur,842001	9300410745	Mr.Sarjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna 800001	9334027706	Mr.Mohit Anhlwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bungalow Road, Patna-800001	9334116145	Mr.Sarjay Choubey
Bihar	Patna	Micro Zone-Patna	A/H Complex,# 626,Near Kotak Mahindra Bank,Exhibition Road,Patna 800001	3294696	Mr.Mritwesh Kumar
Bihar	Patna	Synergy Trading Company	G-01,Dhanakya Plaza Complex, Main Road, Kankarabagh, Patna 8000020	2259900	Mr.Vikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr.PC.JHA, NH-31, Purnea-854326	9304166633	Mr.Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex,Parjap National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	Mr.Abhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Garj road, Opp. Kosa Form , Ambikapur , Surguja. Pin-497001	240427	Mr.Rishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza,GE Road, Supela Bhilai,Chattisgarh-490023	2295989	Mr. Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI 490023	4038917	Mr. Balan
Chattisgarh	Bilaspur	Mahanaya Infotech	Shop No 203 ,Jain Plaza , Ground floor , Link Road , Bilaspur	2413865	Mr. Pawan Kumar
Chattisgarh	Bokaro	Digital Equipment Centre	GB-11,City Palace.Opp.Indian Bank,Bokaro.	9334072270	Mr.Devashish Ojha
Chattisgarh	Korba	Star Mobile Services	SS PLAZA , FD-13 POWERHOUSE ROAD , KORBA-496678	9300040485	Mr. Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh,496001	9972717776	Mr. Ansh Agrawal
Chattisgarh	Rajpur	Dybernet Systems	B-2,1st Floor, Garchaz Complex, Jal Road, Rajpur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhavye Services	SHOP NO 5, BELOW SBI, STATE BANK OF INDIA, KAMPTEE LINE, RAJNANDGAON.	324200	Mr. Manish Golcha
Delhi	New Delhi	Aegiss infotech	UG-25, Ansal Chamber-2, 6, Bhikaji Cama Place, New Delhi-110066	65477740	Mr. Anil Gupta
Delhi	New Delhi	Anham Infotech Services	4737/A 23, Ansan Road, Dayagunj, Delhi-110002	41501124	Mr. Anil Surane
Delhi	New Delhi	Comhand Systems	D-30.31, First floor, Near Hotel Shriya, Main Vikas Marg, Lakhmi Nagar 110092	32955887	Mr Ravil Kant Gupta
Delhi	New Delhi	Comhand Systems	B-120, Hardeo Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk,Shahdara, New Delhi - 110 093.	32575507	Mr. Ravil Kant Gupta
Delhi	New Delhi	Connexions And Communications	183, Avtar Enclave, Opposite Nirula's , Pashchim vihar, New Delhi-110063	32451431	Mr. Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-85, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 41411620	Mr. Anvinder
Delhi	New Delhi	Eloom Trading Company Pvt. Ltd.	G-1 , Goverdhan Building , 53-54 , Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304 , GDITL North Towers, A-09 ,3rd Floor , North Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	930863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj-Mayur Vihar phase -1 - New Delhi -110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Sukriti Communication	101 Patparganj-Mayur Vihar phase -1 - New Delhi -110091	65238011	Mr.Dipendra Kumar Chaturvedi
Delhi	New Delhi	Teletalk	C-21,First Floor,Near Bus Stand,Bhajan pura,Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor,Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Flr, Corner Mkt., Mahiya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05,CARVALHO APPTS,NEAR RAILWAY CROSSING, COMBA,	2736100	Mr.CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Do. No. ASS3 Opp to Hotel Marashanti Dadavaidya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex,Near Rajasthan Hospital, Camp Road,Shahibaug, Ahmedabad-380004	32940560	Mr. Vijay S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEY, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sulkh Sagar Complex, Opp. Dinesh Chamber, Bapurenagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadia
Gujarat	Amreli	Precision Telecom	32.33 Opera House,Station Road, Amreli	230940	Mr. Kamlesh Tank
Gujarat	Anand	Zainee Mobile	2nd Floor, Limbuwala Complex, Nr. GPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr. A. J. Raja
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center,old National Highway No.8,GIDC ,Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex,Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Mahvana Building, Down Chowk, Bhavnagar. 364001	3296222	Mr. P D Jala/ Sandeep patel
Gujarat	Bhuj	Infotech Computer	2nd Floor,Narayanan Chambers,Opp Indian Airlines Office,Station Road,Bhuj	324295	Mr. Vasant Mepani
Gujarat	Gandhidham	Varsch Electronics	Shop No-35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102,Suman City,Sector 11,Gandhinagar-382011	23226241	Mr. K.J Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-4 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manbhai Patel / Neeraj patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradha", Park Colony, Motor House, Near axis Bank, PN Marg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagadh	K.J.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresch Rughani
Gujarat	Kalol	Maitree Communication	B/93,Yogi Complex,opp. Mahendra Mill Road,Kalol	325288	Mr. Jignesh Shah

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T. Workshop Road, Mehsana-384002	2325123	Mr. Sulekta Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAVI MARKET FIRST FLOOR NEAR NEW S.T STAND SANADA ROAD Morvi-383641	9428556667	Mr. Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapri, Navsari-396445	324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21-First Floor, aroma arcade, opp jilla panchayat, near kozi tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahel Road, Near Santokba Hall Patan	9924256098	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor Garden Cafe Building, Opp. New Fountain, N. old R.T.O Office, Porbandar - 360575	2390285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.6, Kuber Complex, Opp Chandubhai Bhelwala, Di Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardamagan(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near iqara Building, Adajan Hazira Road, Surat-395009	6544500	Mr. Virender Jain
Gujarat	Surat	Om Sai Services	39 Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr. Dharmesh Patel
Gujarat	Surendranagar	Nihal Computer Services	94 Old Housing Bord Opp Muni. School No.13, Surendranagar	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	SB-10, Windsor Plaza, R.C. Dutt Road, Alkapuri, Vadodara - 390002		Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mujli Market, Halar Road, Valsad - 396001	3239363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarsan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	3292363	Mr. Anishk Suhasaria
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kajar's Nursing Home, Near Vodafone Office , Bhiwani, Haryana - 127021	252000	Mr. Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	607/1 Gopp Colony Chowk- Sector-19 , Near Piem Prakash Ashram, OLD Faridabad-121002	4104252	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr. Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4,G.T.Road,Near Bus Stand,Marla Colony, Fatehabad	989855244	Mr.Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A , South City -1 , Opposite -Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr. Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL, Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon	3200900	Mr. Bharat Bhushan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Beta Chowk, Gurgaon - 122 001.	3027300	Mr. Deepak
Haryana	Hissar	Parnami Communication	32, Red square Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	Mr. Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr. Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bai Market, Near Randhir cinema- Kaithal	9315146000	Mr. Mahesh
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr. Davender Yadav
Haryana	Kurukshetra	Bharb Communication	3, Krishna Market, Opp. Purohit Sweet House, Pipri Road, Kurukshetra, Haryana-	9354165077	Mr. Vijay

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Haryana	Namau	Prime Communication	Shop no.8 , 1st Floor Taneja complex, near Nirula Hotel , Rewari/Road Namau	9356375351	Mr.Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	Mr.Harish Chandra
Haryana	Panipat	INS Telecom	2.Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	Mr.Pankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	Mr.Gaurave Yadve
Haryana	Rohtak	Telecentre	13, Agna Bazar, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.M.Madaan
Haryana	Sirsa	Sirsa Communication	168,Huda Complex, Old Bus Stand,Sirsa	329591	Mr.Rajindera
Haryana	Sonapat	Televorld	Shop No. 20,1st Floor,M. C. Market,Subhash Chowk,Sonapat,Haryana-138001	3299889	Mr/Vign Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony,OPPOSITE SWANANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA-135001	200610	Mr. Harsh/Mr. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Shama Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	Mr.Deepak
Himachal Pradesh	Mandi	VM Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	Mr/M Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kailu Di Hatz,PO Maranda Thasi, Palampur, Distt-Kangra-176102	238463	Mr.Ravi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar,Near LIC Office, Poanta Sahib	9318785134	Mr.Rajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9 , 2nd floor Lower Bazar Shimla	2650560	Mr.Sandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX,First Floor Upper Bazar-173212	9816271183	Mr.Vikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	2438814	Mr.Diwit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building,Poloview, srinagar	2458549	Mr.Wasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	Mr.Rakesh
Jharkhand	Daltonganj	Maa Mobiles	Jail Road,Jail Hata,Dalton Ganj-822101	9304285663	Mr.Navin Kr. Kashyap
Jharkhand	Deoghar	Kanian Electronics	Hotel Relax Complex,BLC Road,Deoghar-814112	9304059528	Mr.Mahesh Sharma
Jharkhand	Dhanbad	Nirmala Enterprises	Ground Floor,Muskan Complex, Nr Subhash Chowk, Dhanbad.	9334027583	Mr.Niraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani,Katra,Main Market Godda,Jharkhand-814133	9334449800	Mr.Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt, pugmill road,Nr Kallu Chowk, Hazaribagh.	9334589570	Mr.Shishu Alam
Jharkhand	Jamshedpur	Prasad Electronics	Nr Bus stand,Community Center,Kagal Nagar,Jamshedpur.	2228077	Mr.Rajju/ Sanitha
Jharkhand	Jamshedpur	Trinapat Teletech	Chakravarti Compound,Near Hotel Castel,Contractors area,Bistupur, Jamshedpur-831001	3293331	Mr.Abhijeet Mukherjee

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Jharkhand	Ramgarh	Shreyas Empire	Bus Stand Complex,Ramgarh-829122	9334085642	Mr.Pravush
Jharkhand	Ranchi	Balaji Infotech	Near Dr.Kashyap Eyeclinic, Purulia Road,Ranchi.	3205400	Mr.Sanjeev, Mr.Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	15B, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	Mr.Amit Pastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALUK, BANGALORE -562106	320078	Mr.R.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No.4592 Near Inchal Cross Belgaum Road Bailhongal-581102	9343815037	Mr.Vishwarath
Karnataka	Bangalore	Ascent Communication	No.113, St Johns Church road, Bangalore - 580005	32914856	Mr.Kumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRLAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11th Main, 4th Block Jayanagar, Bangalore-560010	32710202	Mr.Prasad
Karnataka	Bangalore	LG Direct Service Centre	No. 93, TKN Mansion , KH Road (Double Road), Bangalore	41145145 / 9738983435	Mr.Raju Naik
Karnataka	Bangalore	Optima Mobile Services	24/2,Dr.Rajumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 85722205	Mr.Unni Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4,Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	Mr.Mohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K. C.COLONY BELLARY 583101	655043	Mr.Krishna Murthy Makam
Karnataka	Bhadravati	Digital Communication	SR Complex,4th cross B H Road Bhadravathi-577301	9341081291	Mr.Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 591320	300027	Mr.Vittal H.Naik
Karnataka	Bidar	Mayur Infotech	Ravi complex,shop no: 4,Uajgir road,Bidar-585401	225544	Mr.Ravi Halhalli
Karnataka	Bijapur	Turning Point Computers	Khed building opp Vijaya college,Sholapur road,Bijapur-586103	323219 / 300005	Mr.S.M.Hiremath
Karnataka	Channarayana	C&C Technology	"Ramanujam Nilaya" No.2104, 11th Cross, Kuvempunagar B M Road, Channarayana - 571501	7251716	Mr.Charan
Karnataka	Chikballapur	Sri Ram Prasad Enterprises	1st Floor: BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	Mr.Vardharaj
Karnataka	Chikmagalur	Cell Tec: Electronics	Ragavendra complex,NMC circle,Neharu road,Chikmagalur - 577101	9341013183	Mr.Prem Kumar
Karnataka	Chintamani	Amrutha Moblies	# 5, Venkatesh Complex, M.G. Road,Opp to Adarsha Theater, Chintamani - 563125	9342282811	Mr.Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, P.J. Extension, Davangere-577002	325444	Mr.Sujay
Karnataka	Gokak	Cell World	Banshanki Complex,Basaweshwara circle, opp to court Gokak - 591307	9343441777	Mr.Shivanand / Chougala
Karnataka	Gulbarga	Aishwaraya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mr.Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindibed college - 573201	9343566658	Mr.Vijaya Shankar

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Karnataka	Hoskote	Expsys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	Mr.Raghubandan
Karnataka	Hubli	Shrofi Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029	3298671	Mr.Mahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	2536899	Mr.H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Moblies	Opp. Basaweshara Hospital, TB Road Kadur	9341033310	Mr.R.Ananda Murthy
Karnataka	Kankapura	Sumukh Communications	Harshitha Complex, Butkikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	Mr.R.C.Harish
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robertson pet, KGF - 563122	329569	Mr.Shiva Kumar
Karnataka	Kolar	Seamatrix	No.394,Suguna complex,Near KSRTC bus stand,Anthargange road,Kolar 560101	2228714	Mr.Nithyanada Shetty
Karnataka	Kumta	Krishna Moblies	938, College road, NH 17, opp RWW, Kumta - 581343	329607	Mr.D.V.Prabhu
Karnataka	Madikeri	C.M.Communications	Shop no. 8, First Floor, M A Complex, Kohinoor Road, Medikeri	9343837555	Mr.Mohamad Shanief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar,Krishna Krupa Nilaya, Mandya-571401	402007	Mr.Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayvarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002	6563244	Mr.Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri-574227	325909	Mr.Vishwas Kumar
Karnataka	Mysore	K.K.Marketng	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewari's Road, Dhanwanthi Road Cross, Mysore -570001	4258613	Mr.Karanakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	222005 / 9448148005	Mr. Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex,Station Road, Raichur - 584101	225300	Mr.Narasimlu
Karnataka	Ranibenur	Knuthika Communication	OLD LIC Building Opp Gupta Petrol Bank, PB Road, Ranebennur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigutti main road, Shimoga-572201	401889	Mr.Panduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Mr.Ravi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Theater, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	Mr.Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No. 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3255770	Mr.Prakash
Kerala	Alappuzha	Getronics	FIRST FLOOR,KARTHIKA BUILDING,OPP SDV BOYS HIGH SCHOOL,COURT ROAD,ALLEPPY	3290446	Mr.Omprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AP Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt. - 678 541	321311	Mr. Rajesh V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235699	Mr.Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Mr.Saji

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Kerala	Badagara	Amarish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	Mr.Jeeju / Mr. Baiju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Cherthali	9388910703	Mr.Mahesh C D
Kerala	Emakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	Mr.Manoj G
Kerala	Emakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office,Janatha Junction, Palariyattom, Cochin-25	3207954	Mr.Sony Thomas
Kerala	Emakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Mr.Jaimon Joseph
Kerala	Irinjalakuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKUDA - 680121	3291515	Mr.Sebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungan, Kalpetta.	329366	Mr.Thanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX,OPPIYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	3259755	Mr.Sandep
Kerala	Kannur	Sahar Communications	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258986	Mr.Ajai Abhiram
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand,Karunagapally-690518	2620282	Mr.Ratish / Prenkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	Mr.M.Sandep
Kerala	Koillam	Digital Infosystems	MC-3067, New Block, Bishop Jeromi Nagar, Chinnakada, Koillem-691001	2760647	Mr.Johnson Lawrence
Kerala	Kottarakara	Sivashakthi Communications	KP-4/1574, Valfiyavila Building, Near Marthoma Girls High School, Pulamon P.O, Kottarakara	3298191	Mr.Suresh
Kerala	Kottayam	Svm Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNTKOTTAYAM, KERALA- 686 006	2565303	Mr.Rajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD,SABA school cross road, Putiyara, Kozhikkode	2722222 / 3243745	Mr.Mukundan
Kerala	Kunnankulam	V Star Mobiles	ROOM NO 4/289/B2 2nd floor,City complex, Opp Tempo Park, Town Hall road, Kunnankulam.	320009	Mr.Vijumon.K.V
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	Mr.Thomason Diacko
Kerala	Mavelikara	Etutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHYAKAVU, MAVELIKARA-690101	3293340	Mr.Biji
Kerala	Palai	Cyriac TV Plaza	Vyvana Building,Petta Road,Palai.	329746	Mr.Tom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12,310/15,FRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKKAD-678001	3200255	Mr.Khaja Hussain
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town,Pathanamthita - 689645	2223132	Mr.M.V.Francis Dommen

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Kerala	Thalassery	Sahar Communication	44-1929,1st Floor, MACKSON MONDR,OPP. PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208665	Mr.Ajai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Mr.Ranjeey Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kapalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mr.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/9554/S, First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Mr.Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No.5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220230	Mr./Aneesh M A
Kerala	Thripunthir	Nice Mobiles	382J, 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thripunthir	3240400	Mr.T.P.Sebastian
Kerala	Tirur	Teit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	Mr.Vasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC23/526,N.P.Tower Guruvayoor Road, Near Bindu Theatre,West Fort,Thrissur.	2387386	Mr.Santom Kalloor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C ,Mannankieril Complex,Bus stand Road,Valiyakavala,Vaikom	326616	Mr.Sueekumar G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr.Deeepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk,Kothi Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akansha Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7552001626	Mr. Dinesh Asija
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	Mr.Neeraj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO 1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mr.Shnu
Madhya Pradesh	Chindwara	Burty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasia Road, Chindwara	220358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bungalow Main Road, Dewas	220005	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauaraha N:Central Bank,Guna-473001	329277	Mr.Deeepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor ,Garapati Plaza, City Centre, Gwalior	4013311	Mr.Pradeep Dixit
Madhya Pradesh	Gwalior	Varaha Sales & Service-Agg	GROUND FLOOR SARAFI BAZAR LASHKAR,GWALIOR	4060444	Mr.Ajit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10,Ratnamani Complex, 7/1,New Palasia, Indore-452001	3251284	Mr.Santosh Dwivedi
Madhya Pradesh	Indore	IT Customer Care	UG- 11 , B. M TOWER, OPP. LOTUS,SARNA SANGITA ROAD ,INDORE	3207283	Mr. Sanjay Dhanikar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006003	Mr.Ritesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayashree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	Mr.Aklesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY,766,SHAHID SMARK MARG,NEAR RANITAL SQUARE,JABALPUR-482001	4048231	Mr.Mohit Sareen
Madhya Pradesh	Jabalpur	IT Solution	Opp Dr.Grover Hospital ,Gate No-3, Wright Town ,Jabalpur	4014064 / 4064370	Mr.Sanjeey Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Guronanak Road, Katni	406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL,KHANDWA	2230089	Mr.Yashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Pavai Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	Mr.Gaurav B. Mittal

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD , JIWAJI GUNJ , OPP BANK OF INDIA, MORENA	400886	Mr.T C Shrivare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off., NEEMUCH (M.P.)	320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL,SHOP NO.2,ANNAM CHHAYA,REWA ROAD	416455	Mr.Ajay Sukhrmani
Madhya Pradesh	Satna	Maa Shaarda Communication	Gali No1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	767230797	Mr.Prashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	Mr.Sameer Savena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varuchi Marg Opp Madhav Nagar Police Station, Freeganj, Ujjain	2515995 / 253999	Mr.Anurag Chhajhani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDDHI, NR. CHOUPATI, KARANJUA-414001	226267	Mr Anil Apte
Maharashtra	Akola	Supra Computers	Ushakran Complex,Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor,Gulshan Towers, Nr. Panchasheel Cinema, Amravati, Pin-446001	2567302	Mr. Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building,opp. To Shivaji School,Khokadpaura, Aurangabad-431001	6454532	Mr. Rauf
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 109A, FIRST FLOOR, TAPADIYA SUPAR MARKET, NIRALA BAZAR, AURANGABAD -	2356447	Mr.Mahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vacrnalay rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO.2, PRABHU CHAYA BLDG, PRABHU ALI, NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	222853	Ms. Swati
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashtraiv Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindi Colony, Chandrapur-442 401	229546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing,Jai Ganesh Vision,Next to Hotel Neelkanth,Near Farm Multiplex,Akardi, Pune-411033	27495613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Devpur Bus stand , Agra rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Coffee house, Railhoi, Gondia 441614	329322	Mr. Krishna Sangam
Maharashtra	Hatkarange (Italkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO 814, STATION ROAD, TAL- HATKARANJE, CITY-ICHALKARANJU-416115	2439989	Mr. Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppo	Kachare Lane Islampur, Distt Sangli	932677903	Mr. D.H.Patil
Maharashtra	Jalgaon	TellUs Associates	Shop No 16, 'G' Wing 1st Floor, Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Ms. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kalyan	Sky Lark Associates	Shop 1, 'A' Wing, Suresh Tower Co-op. Hsp. Soc. Opp Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3208989	Mr. Pravin
Maharashtra	Kolhapur	Sms Services	SS, Diwan Tower, Opp. Nutan Marathi School, Near Mirajraj Tikky, Kolhapur, Pin-416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Dahamgaon Road, Kopergaon, Dist Ahmednagar.	9373295009	Mr.Mahendra Dewkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no, 111, Shop 59, 49 Gandhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Parande

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampur, Malegaon	9326211996	Mr Assani Mohd Israfil
Maharashtra	Mumbai	Cyber-Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24079399	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.Electronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	222363960	Mr.Mayur
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivili (W I), Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hsg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1.2.3 Ground Floor,Rajakamal Bldg,Opp Ram Mandir,Subhash Road,Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Ghatkoper (E), Mumbai - 400 077.	40111264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan,Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	8-A,Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKhetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower,Shop no.1, Opp.Film Centre,Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apna Bazar, Nehru Road, Mulund (West) Mumbai-400080	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhakati Vilhar Complex, Chapro Nagar Square, Lakadganj, Nagpur - 440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440004	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth ,Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside Forest office Nr. Ranbrikdar Resi:Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR,KAPOTE-MEHER MARKET, RENUKA NAGAR, WADALA NAKA,DAWRKA, NASIK	6522613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekyen Enterprises	Block No.1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dak	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin
Maharashtra	Panel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panel (E),Dist. Raigad.	9322217221	Mr. Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373436000	Mr.Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32901222	Mr. Nilesh Pundye

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Maharashtra	Pune	Microchip Solutions	Atshay Chambers 216 Narayan Peth, Near Bhide Bridge, N C Kellar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30842268	Mr Pawan Marthi
Maharashtra	Pune	Vika Info Technologies	Shop No.4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	Mr Vivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Paramani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr Santosh Prabhu
Maharashtra	Sangamner	Rajal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. G. S. Joshi Banglow. Opp. B.Ed Collage, Rajwada, Sangli., Tq. Miraj, Dist.- Sangli.	2327601 / 06372107601	Mr. Suresh Shegane
Maharashtra	Satara	Shivak Mobilink	173/6/7 Ravivaripeth shop no-11, Vithal Lila Complex, Powai Naka , opp Janta Bank, Satara-415002	325272	Mr. Mahesh Shinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shrirampur-413709	9326611445	Mr. Kedar Fargade
Maharashtra	Solapur	Athava Electronics Pun	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	2317595	Mr. Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharalal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr. Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesht Temple, Near Mahalmali Talao, Edujli Road, Chana, Thane (W) 400602	32130222	Mr. Paresh
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C, Bldg no 5/6, Shanti Vihar, Mira Road -E	9322839386	Mr Omkar
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Mian, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki
Maharashtra	Virar	Siddhivinayak Tele Services	Shop no 586, Vishnu Prasad Complex, Opp Ulkarsha School, Near S.T. Bus stand, PP, Mang., Virar ( West)	325811	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Optical, Sohalist Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms. Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datay college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr Snajay Chabda
Meghalaya	Shillong	Phapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	329207	Mr. Tapas Sahu
Orissa	Balassore	Raghunath It Solutions	Azimabad, Prof Road, Balassore-756001	329267	Mr. Sujit Ki Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Shama
Orissa	Bhadrak	A B Associates	Nr Reliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Karik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr Chacoj Suprava

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Orissa	Bhubaneswar	S.A Infosys	291 Bomikhal, Opp.Akarma cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajrath Infocomm	At Municipal Mk,Grand Road,Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13 Bisra Road,subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Ambala	Bee Ess Aar Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mr. Rajiv Gupta
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3259599	Mrs.Suman Bajaj
Punjab	Batala	Unique Infotech	Mittal Street, Near M C Office, Batala-148101	238007	Mr.Pankaj Goyal
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office , Dharamsingh Market, Batala,	9316676018	Savdeep Singh
Punjab	Bhatinda	Lali's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda-151005	2239500	Mr.Ashok Kakria
Punjab	Chandigarh	New Tech	SCD 495/496 SEC 35C First floor	9814244862	Mr.Pawan
Punjab	Chandigarh	Vignesh Services	S.C.O.- 189-90,Sec- 34,Chandigarh	3018028	Mr.Mukesh Anya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhoban Wali Gali,Phagwara Road, Hoshiarpur-146001	226906/ 2232906	Mr.Kuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udhm Singh Nagar,Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	Mr.Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217.C Block,Jama Masjid, Shopping Complex-144601	329254	Mr.Arun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI/ Railway Road-151204	223069 / 9815758239	Mr.Rohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms.Monia chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurant 4X International, 583 L, Model Town, Ludhiana	3244190	Mr.Amit Shahi and mrvimal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALUAT PIN NO - 152107	9316940003	Mr.Ramesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate.Govt College, Malerkotla-148023	253899	Mr.Rohit Bansal/Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and exise office Mandi Gobindgarh	328996	Mr.Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPP/PARKASH BOOK DEPOT, Mansa	9316173009	Mr.Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road,Court Road, Near Old Court, Moga-142001	222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	504501	Mr.Girish Gang
Punjab	Navashar	Kapoor Electronics	Kothi Road, Opp Kumar Hotel,Navashahr-144514	508085	Mr.Narendra Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr.Mr Kamal
Punjab	Pathankot	Touch Infoeys	189 Opp. Guro Nanak Park, Model Town, Pathankot	3293000	Mr.Navdeep Singh Bedi
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 987281524	Mr.Rohit Bansal

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Punjab	Phagwara	Bansal Telecom	G T Road,Railway Road Chowk Near Connect Office , Phagwara-144401	461321 / 9888005339	Mr.Mangatesh
Punjab	Rajpura	M K Enterprises	Shop no.6,Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	Mr.Johny
Punjab	Ropar	Arora Communication	Shop No.1,Lehari Shah Mandir Road,Ropar	9872363032	Mr.Amit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road,Near Garg Laboury	520548	Mr.Vaneet Kumar
Punjab	Sangru	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO = 148001	233335 / 9814586196	Mr.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Grain Market,Cinema Road Sindhind City-140406	500726	Mr.Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, A.JMER-305001	3291404	Mr.Suresh Sharma
Rajasthan	Ajmer	Prangan	112/10,Civil lines,Ajmer	9828503092	Mr.Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLU CIRCLE ,Alwar		Umesh sharma
Rajasthan	Beawar	Sikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus,Beawar	329675	Mr. Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3,Bapna Complex,Pur Road,Bhilwara	029549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	Mr.Aziz/Vika
Rajasthan	Chittorgarh	Ahiant Infotech	A46,Meera Market,Near Rajasthan Patrika Office, Chittorgarh-312001	329583	Mr.Abhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra,dhan ji ka gali,Sadar Bazar Chomu-303702	9314090400	Mr.Anup Tambi/Dp Saini
Rajasthan	Dholpur	Tiruqati Telecom	14,Bhagwati Market,Near Jagan Cinema hall,Jagan Tiraha,Dholpur	9314014093	Mr.Moshin/Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3295724	Shatrughn mangal
Rajasthan	Jaipur	Alliance Communication	G6,City plaza,Space Cinema Hall,Jhotwara Road,Jaipur-16		Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar Station,Jarpath Near Hotel Paradise, Jaipur	5106388	Mr.Dhirej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex Opp Roadways Bus Stand,Jhunjunu	9314011951	Mr.Abhishek / Mr.Sunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhaliyaChowraha Jodhpur-342003	3291214	Mr.Pratap Singh
Rajasthan	Kishangarh	Capital Enterprises	5,Radhika Krishan market,Opp. Sardul school,Kishangarh-305801	328550	Mr.Shatrughan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palival market, Gumanpura, Kota-324007	2392153	Mr.Rajnish
Rajasthan	Kota	Saya Electronics	1-1A-16,Vijayan Nagar,Kota	9828503246	Mr.Lalit
Rajasthan	Kotputli	Isha Communications	11,ground floor,Govardhan plaza,Nehru Bazar,Kotputli	9314140001	Mr.Vijender
Rajasthan	Nagaur	Jam Appex	Shop num.7,Opp. Old power house Ram Pali,Station road,Nagaur	329555	Mr.Amit
Rajasthan	Nathdwara	Genuine Infotech	Shop num.10, Suriya apartments,Opp Vandana talkies,Bus stand, Nathdwara.	329208	Mr.Gajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9,Vasant Vihar,Opp. Bangur college,Pali-306401	9352766555	Mr.Abhishek
Rajasthan	Shrianganagar	Telecare Servecies	33,J Block,Near Birbal Circle,SrGanga nagar	3207887	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shrandan Mang,Sikar-332001	329320	Mr.Sauvav Chakravarthy

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Rajasthan	Udaipur	Shree Teleslink	31 First floor Indira prasth complex Delhi gate,Udaipur-313001	9261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram-627401	2511443	Mr Raja Selvakumar
Tamilnadu	Anknam	G.M. Marketing	NO 3/4, SUBURBAN STREET ,ARAKKONAM-631001	231395	Mr.Mr.PGajapathi
Tamilnadu	Ami	Digitech Computers	Shop No. 201/82- 81, SM Road, Arani - 623101	223929	Mr.D.Mohan Ram
Tamilnadu	Aruppakkottai	The Mercury Computers	607,MADURAI ROAD,NEAR NEW BUS STAND, ARUPPIKOTTAI-626101	222552	Mr.R.Boomianathan
Tamilnadu	Attur	VR. Net	VR.Net,Dr.Arumugam complex,salem main road ,ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Baglagundu	Karthik Communications	No 221, Main Road , Baglagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E , Pavadi Street , Anthiyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapattu	SKB Electronics	No-42 Devarajapuram pillai Street, Vedachalam Nagar, Chengalpet	3740690	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr.Suresh
Tamilnadu	Chennai	GS Systems	547/552, F.M Towers, Mount Road, Nandaram, Chennai-600025	24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	BZ, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	Mr.Palani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road,Next to Indian Overseas Bank,Kodambakkam Chennai - 24	24724666 / 52047059	Mr.Kartik
Tamilnadu	Chennai	Garage De Telecom	Old No:30 NEW No:10,KMBF BUILDING,1ST FLOOR,DURAISAMY ROAD, NEAR POTHYS,T.NAGAR,CHENNAI 600017	28143454	
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.P.Street, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374075	Mr Arivadhagan
Tamilnadu	Coimbatore	Fast Track	136-C, TV Swamy Road ( West ), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucomm Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351568	Mr.Uthaman
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO. 37 (2C) BHARATHI ROAD,CUDDALORE. 607 001,CUDDALORE DISTRICT,TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CUMBUM-625516	320800	Mr.Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Cariny Digital Photo&Audio	98/29C KANDASAMY VADYAR STREET, DHARMAPURI,636701	329707	Mr.Raj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15,Dudley high School, Dindigul	9367927080	Mr. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/7, kms complex kachery medu,gobichettipalayam	225598	Mr.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246887	Mr.Shanmugam
Tamilnadu	Kallikuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLIKURUCHI	228270	Mr. Murugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No 67-A, (Shop No.5), PS. K. Street, Kancheepuram-631 501	9345636900	Mr.Damodaran

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Tamilnadu	Karaikal	Shree Harni Cellular Service	OPP. TO NEW BUS STAND , BHARATHI MAIN ROAD,KARAIKAL-609602	320544	Mr. K.Sehaganapathy
Tamilnadu	Karaikudi	Sriyees Electronics	10 A / 3 , Muthulakshmi Complex, Opp to Income Tax Office, Sekkai, Karaikudi - 630002	9362611465	Mr.S Veerapandyan
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass Road , Karur-639001	9843045655	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	Mr.Jyaganan
Tamilnadu	Krishnagiri	Madura Care Centre	No.361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9962582223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HALIAR STREET, KUMBAKONAM- 612001,	2401123 / 3930303	Mr. Subuddeen
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam , Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street,Near Ayyappan koil, Ththalakulam, Madura-625002	4360895	Mr. Guna
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road , Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	329304	Mr.R Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO.302,Band lane, Commercial road,Near Liberty Theatre, Ooty-643001.	2443787	Mr.Sujith & Miss .Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. IOCI Bank, Palani - 624601	320264	Mr.R Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 9B, High school Road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127,BIG STREET,PATTUKOTTAI	9842633921	Mr.Anul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp.,Perambalur	275717	Mr.PKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad ,perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immanikan Street, POLLACHI.	222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Penumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	Mr.G Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No.21,3rd CROSS STREET,ANNANAGAR,PONDICHERRY.	3094114	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO.26,THALUKKA OFFICE ROAD,PONNERI,THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	Mr.Naveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378 , 79 , Alangudi Road, Pudukottai- 622001.	9944038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292/1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	2202398	Mr.Ku.G Muthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-629501	226750	Mr.M.S. Jahir Hussain
Tamilnadu	Rasipet	Unicare Infocom Services	No.36,opp Gangadhara Mudaliar Middle School, MBT Road ,Novelpur,rasipet,Vellore Dist.	270806	Mr.Baskier/Mr.Karthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor , Rasipuram-637208	9345052553	Mr Menikavasagan

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Tamilnadu	Salem	Vishvesh Mobiles	Sixer Complex, 121/9A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	329535	Mr.Vaudeev Nayak
Tamilnadu	Sivakasi	Tele World	7B, PARSN PLAZA, OPP TO WATER TANK, SIWAKASI-626123	325730	Mr.B Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43 ,Old No.3A,Mulichur road,Tambaram west,chennai 600045	32915599	Mr.Palani/Mr.Ranjith
Tamilnadu	Tenkasi	Airtone	1/17, KMSS complex, west masi street, Tenkasi- 627811	227980	Mr.M.Nagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 239564	Mr.Ziauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	Mr.Lakshmi Narayanan
Tamilnadu	Truchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Truchendur. 628215	329380	Mr.Mahesh
Tamilnadu	Truchergode	Balaji Electronics	108 s s d road,near lorry stand thiruchergode	325430	Mr.Sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalkimart, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801 / 3293338	Mr.Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1,kkc complex,krishnagiri road,tirupattur	325385	Mr.Sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road,Karuvam palayam, Tirupur -641604	4244009	Mr.U.B. Bala Murali
Tamilnadu	Tiruvarur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvarur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37800329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	Mr.Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20-B-1,W G C Road, Tuticorin-628002	2334043	Mr.Kennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thuluvavellar shopping complex, V.O.C. street,UDUMALPET.642126	223047	Mr. Sentamarai Kannan
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, Cl. Road, Vaniyambadi - 635 751	395023	Mr.Lakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Oda Pilliar Koi, Gandhinagar/Vellore - 632006	2249800	Mr.Gunaa Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nehruji Road,VILLUPURAM	222936	Mr.Pragasam
Tamilnadu	Vinudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uthavar sandhai), Vinudhunagar-628001.	420160	Mr. Karunpuswamy
Tripura	Agartala	VIDEO S R	7Melarmeth, H.G. Bask Road,Agartala,West Tripura.Pin:790001	2326539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	Mr.Ankur Goyal
Uttar Pradesh	Aligarh	A/V Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	320980	Mr.Vaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1 ,SHOP NO. FF3 WASHITSTHA VINAVAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	8336395183, 3250231	Mr. Hashmi

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEDNA BAZAR,Allahabad	3392488	Mr. Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zatt, Near Tehsil Mor., J.P.Nagar AMROHA-244221	9319075289	Mr.Arun bhargav
Uttar Pradesh	Azamgarh	Rajasthali	ASF GANJ, CHOWK, AZAMGARH-276001	223644	Mr.Triloki Nath Jalaan
Uttar Pradesh	Badun	Customer Care Services	Plaza Market 1st Floor Near Ghantaghar sumad Badun.	9319697938	Mr. Nazim
Uttar Pradesh	Baile	Sankatha Communications	Mall Godam road D.S. N.pandey Clinic Chowk Baila-277001. UP		Mr. Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar,First Floor, Nagar Palika Road, Barabanki	9336323714	Mr. Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr. Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex,Near Gupta Watch Co,116 Civil Lines,Bareilly	3297933	Mr. Dharendra Neogi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, janta hotel, gandhi nagar, basti	9336784054	Mr. Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road , Near Narmada Girls Inter College. Bhadohi-221401	9235506029	Mr.Kislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7,1st Floor,Near Ajaz Ali Hall,Nagar Palika Complex, Bijnor-246701	9356364067	Mr.Pratyush Gupta
Uttar Pradesh	Bulandshahr	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX,KALA AAM, Bulandshar	9358011688	Mr. Tausik Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD,NEAR GANESH MANDIR, CHANDOUSI - 202412	9359867866	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5,SHANTI COMPLEX,HANUMAN MANDIR ROAD	9335276799	Mr.K.N Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar,Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719338761	Mr.Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Swil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor,Baldev Plaza,Rohabganj,Faizabad	395744	Mr.Kapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AVAS VIKAS,LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mr.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAURAH, NASEPHER ROAD,FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Ghaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	Mr.Aseem Saraswat
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (C&I)	C-83, Rajnagar District Center (RDC), Ghaziabad	3392011	Mr.Anil Triwani
Uttar Pradesh	Gonda	Digitech Services	Suraj Complex Malviya Nagar ,Ground Floor,In front of Distt. Mahila Hospital,Gonda	9336865719	Mr.Atul Singh Chauhan
Uttar Pradesh	Gorakhpur	Etemal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bungalow, Gorakhpur -273001	9336410222	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Besharapur, Gorakhpur	9350395	Mr.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	1D, 1st Floor,City Plaza , Hapur, Ghaziabad - 388001	9719659597	Mr.Rajkumar Kanoojia
Uttar Pradesh	Hardoi	Shriya Electricals & Appliances	SHOP NO.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	Mr.Gaurav
Uttar Pradesh	Hathras	Anyo Electricals	Bldg No.2206,Near Mayfair Hotel,Kamia Bazar,Hathras-204101	9319338655	Mr.Suneet Anya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College,Jaunpur	9336510130	Mr.Sudhir/Sanjay

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235409278	Mr Mahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mr. Sajeet
Uttar Pradesh	Kannoj	Dixit Mobile Lab	SHOP NO. A1 WARS COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	Mr. Sunil Dixit
Uttar Pradesh	Kanpur	Aakarsh Electronics	63/2 DQBALAJI COMPLEX THE MALL, KANPUR	9335390303	Mr. Raman
Uttar Pradesh	Kanpur	IB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	Mr. Deepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	Mr. Vinay Agrawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, G. T. Road, Khatauli-388001	9319666000	Mr. Alok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GURDARSHAN BUILDING, KACHEHI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335082598	Mr. Saurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No GF20 ABC Complex, Kanpur Road, Lucknow	3248730	Mr. Harjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335089861	Mr. Ravi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr. Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp. Krishna Bhowan, Lucknow-226024	3294222	Mr. Vinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	Mr. Rohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB - Mainpuri-205001 (U.P)	9358090251	Mr. Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Athiya Palace, Sankh Adda, Junction Road, Mathura-281001	3292274	Mr. Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	Mr. Ajay Mittal
Uttar Pradesh	Meerut	Coincap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	Mr. Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025963 / 9837067894	Mr. Rajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP- LIC OFFICE, MIRJAPUR-231001	9335205660	MR. Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N. MODI COMPLEX, Modinagar-201204	325424	Mr. Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	Mr. Vivek Kumar Singh
Uttar Pradesh	Mugalasari	Sky Mobile World	SUPER MARKET, MUGALSARAI	9336251754	Mr. Vibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No.15-prakash chowk, Muzaffarnagar-251001	9412710142	Mr. Rajiv
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk Central Bank Mkt, Muzaffarnagar-251001	3294447	Mr. Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	4312715	Mr. Kailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M. A. Jilani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335053001	Mr. Rajesh Aggarwal
Uttar Pradesh	Rai Bareilly	Kanuna Enterprises	Shop No.6 & 7 City Complex, Kachary Road, Raerailly	933603741	Mr. Vikas
Uttar Pradesh	Rampur	Mamta Technologies	3fs Shopping Complex, Rahe Murtaa Road, Civil Lines, Rampur-244901	3294923	Mr. Rajeev Yadav

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor,Pradeep Hotel Compound,Court Road, Near Indiam bankSa- harpur-247001	3250239	Mr.Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ,SHAHJANPUR	9335019616	Mr.Rajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Muncipal Market, Sitapur		Mr.Sanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 148/15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	Mr.Sachin Dwivedi/ Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	Mr.Vishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabi, Varanasi-221001	9335407000	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5,837/115-B-1 Baradani Complex,Pathyatra Crossing,Varansi Pin 221010	9335418998	Mr.Rakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun,Uttaranchal-248001		Mr.Vinod
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor,Nainital Road,Uttaranchal Trade Centre, Tikonia Chouraha, Tikonia, Haldwani	282116	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashpur	Tirpi Communications	Station Road,Main Market,Udam Singh Nagar	935900000	Mr.Ajay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6,Shyam Market,BSM Tiraha,NehruNagar,Dehradun Road, Roorkee-247667.	328510	Mr. Manish Kumar
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Asansol-713301	2207719	Mr.Syed Arshad Ali
West Bengal	Behrampur	Chaitanya Enterprise	152. B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad,pin- 742101	9333310161	Mr. Subhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET,SANTINIKETAN ROAD,BOLPUR - 731204	252542	Mr.Kishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 G T Road , East End, Burdwan -713103	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane .Benachity ,Durgapur -713213	3293600	Mr.Pintu Chatterjee
West Bengal	Haldia	Digtronix	Holding no -25 PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinipur-721602	277277 / 9332967527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51,Jessore Road,Habra Bazar, Das Market,Dist- 24th Pargana(North),PIN- 743263	302399 / 369877	Mr. Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhulnathi Tala,Besides Ram Bhawan,Post - Katwa,Burdwan - 713130	9333611904	Mr. Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inde Main Road, Khudiram Ram Market, Kharagpur .Shop No-53. Pin -721305	324056	Mr.M.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 DT Road,Scheme VIIM,KOLKATA 700 067	32943176	Mr.Arun Surana

STATE	CITY	ASC NAME	ASC ADDRESS	PHONE NO.	CONTACT PERSON
West Bengal	Kolkata	Friends Communication	328/ Barasat Road,N/L 15 no railgate PO-honachandarpukur,PS- Titagarh, Barrackpore, Dist- North 24PSS, PIN-743102	25921283	Mr Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jaksom Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Hardutrai Chamarla Road,Howrah-711001	32950383	Mr.PMukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	24401923	Mr.Somim Kabir
West Bengal	Kolkata	Skylink	8/7A, Little Russel Street, Calcutta-700071	32903814	Mr.H R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikapara Bus Stop, Kolkata -700002	32505444	Mr.Vivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukherjee Lane,Krishna Nagar,Nadia-741101	2229355	Mr.Arijit Sen
West Bengal	Malda	Deb infotech	PIRO,PIUR,WOMENS COLLEGE ROAD,MALDA-732101	9434345486	Mr.UTPAL DEVIDEBASIS
West Bengal	Midnapore	Zerobit	Viii - Parbatpur ,P.O.-Tamluk,Dist- Purba Midnapur,PIN-721636	267476 / 9434110802	Mr.Chanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI VIVAKNANDA SARANI ,RANAGHAT, DIST-NADIA,	9333515949	Mr. Amar Nath Mallick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) Bashirhat Dist,North 24pgs,PIN-743411	325499	Mr. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road,Bongaon ,Dist- North 24 th Pargana ,PIN-743235	325433	Mr. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT(NAMO PARA), PURULIA - 723101	9333441065	Mr.Pinali Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West) ,Hooghly Pin-712203	32528581	Mr.Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building,160/1030 Haren Mukharejee Road,sili guri-734001	6450515	Mr.Sjoy Dutta

 <b>LG</b>	<b>CUSTOMER SERVICE</b>
*From: BSNL / MTNL	<b>1860-180-9999*</b>
**From Mobile: Add local STD Code	<b>39-01-0909**</b>

